PackardBell Viseo 193ws

Service Guide

http://www.wiel.net

20" Designer Series Television

Technical specifications

Picture Quality

• ***20" High Controst Tube***
Delivers a vivid picture and is flatter and larger compared to 19" televisions.
• ***Digitol comb filter***
Separates chrominance (color) from luminance (brightness) information for independent processing to improve picture resolution and minimize distortion.
• ***Dynomic Noise Reduction***
Reduces picture graininess caused by weak signals to produce a clearer picture and enhance the viewing experience.
• ***3-Position Color Temperoture***
Customize picture to your personal flesh-tone preference with cool, normal and warm settings.

Ease of Use

• ***QuodroSurf™ Remote***
Controls all TV features with easy to use onscreen menu.
To personalize and customize TV viewing simply use each of the four colored surf buttons to view up to ten of your favorite programs by category (that's 40 total movie, sports, news, music, children's, etc.) or by family member. The AV inputs can also be programmed for use as a "source" selector.
• ***AutoPicture™***
Instantly optimizes brightness, contrast, color, tint and sharpness settings with picture presets for Movies, Sports, Video games and weak signal reception.
• ***AutoSound™***
Audio volume levels are automatically adjusted and optimized with the choice of three presets: Movies, Voice, Music plus an adjustable Personal setting.
• ***AutoMute™***
Automatically activates the closed-captioning when the MUTE button is pressed.
• ***AutoLock™***
Protects young children from objectionable programming with V-chip technology.

Any-Button-On Front Controls
Chonnel Auto-Progromming
English/Sponish menu
240-minute Sleep Timer
Closed Coption viewing

This television receiver provides display of television closed captioning in accordance with 15.119 of the FCC rules.

Sound Quality

• ***Boss & Treble Boost***
Full, detailed sound from your favorite movies and shows with these menu-selectable controls.
• ***Duol speoker WIDE sound***
Speakers on both sides of the screen fill the room with sound to enhance your viewing experience.

Connectivity

• ***Front AV inputs + eorphone jock***
Connecting digital cameras and video games is quick and easy. You can enjoy your favorite program or game without disturbing others by connecting your earphone (optional) to the handy front jack.

Front AV inputs + Earphone jack

UPC:	0 37849 93169 1
Product Dimensions:	23.S"W x 18.7"H x 18.7"D
Product Weight:	4S.6 lbs.
Carton Dimensions:	26.3"W x 22.3"H x 21.9"D
Carton Weight:	S4.3 lbs.
Carton contains:	QuadraSurf™ Remote Control w/batteries, operating instructions, warranty information

AutoSound™, AutoPicture™, AutoMute™, AutoLock™, QuadraSurf™ are trademarks of Philips Consumer Electronics Company.
Printed in the U.S.A.
©2003 Philips Consumer Electronics Company

www.philipsuso.com or AOL keyword: Philips
Specifications subject to change without notice.

PHILIPS

Downloaded from www.Manualslib.com manuals search engine

LCD TV with Digital Crystal Clear
19" integrated digital

19PFL3403D/F7

Specifications

Picture/Display
- Aspect ratio: Widescreen
- Brightness: 300 cd/m²
- Contrast ratio (typical): 800:1
- Dynamic screen contrast: 4000:1
- Response time (typical): 5 ms
- Viewing angle: 160° (H) / 160° (V)
- Diagonal screen size: 19 inch / 48.1 cm
- Visible screen diagonal (inch): 18.95 inch
- Panel resolution: 1440 x 900p
- Picture enhancement: 3/2 - 2/2 motion pull down, Digital Crystal Clear, Dynamic contrast enhancement, Progressive scan

Supported Display Resolution
- Computer formats

Resolution	Refresh rate
640 x 480	60Hz
800 x 600	60Hz
1024 x 768	60Hz
1280 x 1024	60Hz
1440 x 900	60 Hz

- Video formats

Resolution	Refresh rate
480i	60Hz
480p	60Hz
720p	60Hz
1080i	60Hz

Sound
- Output power (RMS): 2 x 3W
- Sound Enhancement: Incredible Surround
- Sound System: Dolby Digital (AC-3)

Loudspeakers
- Built-in speakers: 2

Convenience
- Child Protection: Child Lock+Parental Control
- Clock: On main display, Sleep Timer
- Ease of Installation: Autostore, PLL Digital Tuning, Plug & Play
- Ease of Use: Auto Volume Leveller (AVL), Channel list, Side Control
- Remote Control: TV
- Remote control type: YKF230-008
- Screen Format Adjustments: 4:3, Auto Format, Movie expand 14:9, Movie expand 16:9, Super Zoom, Widescreen

Tuner/Reception/Transmission
- Aerial Input: 75 ohm F-type
- TV system: ATSC, NTSC
- Video Playback: NTSC
- Cable: Unscrambled Digital Cable -QAM
- Tuner bands: Hyperband, S-Channel, UHF, VHF

Connectivity
- AV 1: Audio L/R in, YPbPr
- HDMI 1: HDMI v1.3
- HDMI 2: HDMI v1.3
- Front / Side connections: CVBS in, Audio L/R in, Headphone out
- Audio Output - Digital: Coaxial (cinch)
- Other connections: PC Audio in, PC-In VGA

Power
- Ambient temperature: 5 °C to 40 °C
- Mains power: 90-110V, 50-60Hz
- Power consumption: 50 W
- Standby power consumption: < 0.3 W

Dimensions
- Set dimensions in inch (W x H x D): 18.4 x 13.7 x 2.7 inch
- Set dimensions with stand in inch (W x H x D): 18.4 x 15.4 x 6.5 inch
- Weight incl. Packaging (lb): 12.7
- Product weight (lb): 8.7 lb
- Product weight (+stand) (lb): 9.6 lb
- Box dimensions in inch (W x H x D): 20.2 x 17.6 x 5.9 inch
- VESA wall mount compatible: 100 x 100 mm

Accessories
- Included accessories: Table top stand, Power cord, Quick start guide, User Manual, Registration card, Remote Control

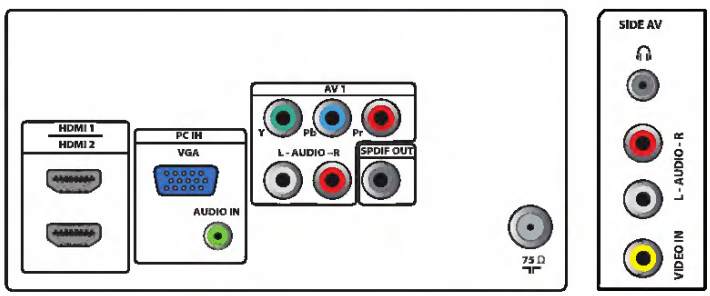

Issue date 2009-12-14

Version: 2.0.1

12 NC: 8670 000 47451
UPC: 6 09585 16243 3

© 2009 Koninklijke Philips Electronics N.V.
All Rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com

Downloaded from www.Manualslib.com manuals search engine

IMPORTANT SAFETY INSTRUCTIONS
Read before operating equipment

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any of the ventilation openings. Install in accordance with the manufacturers instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and third grounding prong. The wide blade or third prong are provided for your safety. When the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. This product may contain lead or mercury. Disposal of these materials may be regulated due to environmental considerations. For disposal or recycling information, please contact your local authorities or the Electronic Industries Alliance:www.eiae.org.
16. **Damage Requiring Service** - The appliance should be serviced by qualified service personnel when:

A. The power supply cord or the plug has been damaged; or
B. Objects have fallen, or liquid has been spilled into the appliance; or
C. The appliance has been exposed to rain; or
D. The appliance does not appear to operate normally or exhibits a marked change in performance; or
E. The appliance has been dropped, or the enclosure damaged.

17. **Tilt/Stability** - All televisions must comply with recommended international global safety standards for tilt and stability properties of its cabinets design.
    - Do not compromise these design standards by applying excessive pull force to the front, or top, of the cabinet which could ultimately overturn the product.
    - Also,do not endanger yourself, or children, by placing electronic equipment/toys on the top of the cabinet. Such items could unsuspectingly fall from the top of the set and cause product damage and/or personal injury.
18. **Wall or Ceiling Mounting** - The appliance should be mounted to a wall or ceiling only as recommended by the manufacturer.
19. **Power Lines** - An outdoor antenna should be located away from power lines.
20. **Outdoor Antenna Grounding** - If an outside antenna is connected to the receiver, be sure the antenna system is grounded so as to provide some protection against voltage surges and built up static charges. Section 810 of the National Electric Code, ANSI/NFPA No. 70-1984, provides information with respect to proper grounding of the mats and supporting structure grounding of the lead-in wire to an antenna-discharge unit, size of grounding connectors, location of antenna-discharge unit, connection to grounding electrodes and requirements for the grounding electrode. See Figure below.
21. **Objects and Liquid Entry** - Care should be taken so that objects do not fall and liquids are not spilled into the enclosure through openings.
    a) Warning: To reduce the risk of fire or electric shock, this apparatus should not be exposed to rain or moisture and objects filled with liquids, such as vases should not be placed on this apparatus.
22. **Battery Usage CAUTION** - To prevent battery leakage that may result in bodily injury, property damage, or damage to the unit:
    - Install all batteries correctly, with + and - alignment as marked on the unit.
    - Do not mix batteries (old and new or carbon and alkaline, etc.)
    - Remove batteries when the unit is not used for a long time.

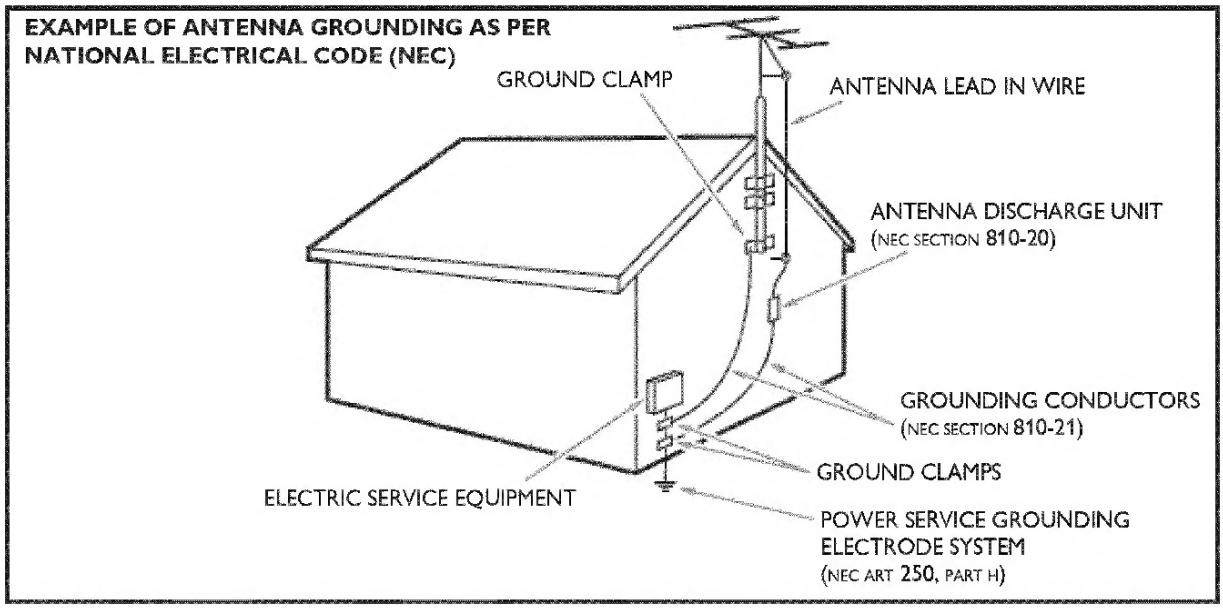

Note to the CATV system installer: this reminder is provided to call the CATV system installer's attention to Article 820-40 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

Downloaded from www.Manualslib.com manuals search engine

تثبيت التلفزيون (التوصيل الاساسي)



توصيل الهوائي

- اوصل قابس الهوائي مع فتحة توصيل الهوائي ⊤ الموجودة على الغطاء الخلفي للتلفزيون.
- ادخل قابس سلك الطاقة الكهربائية داخل فتحة مأخذ الطاقة الكهربائية الموجودة في الحائط.



التوصيل مع مأخذ الطاقة الكهربائية

- من اجل فولتاج الطاقة الكهربائية الصحيح، ارجع الى الملصق الموجود على خلفية جهاز التلفزيون.
- استشر عميلك المحلي اذا كان مصدر تزويد الطاقة الكهربائية مختلفا.
  ملاحظة: هذا الرسم لا يمثل القابس وفتحة مخرج الكهرباء الحقيقية.



تشغيل جهاز التلفزيون

- اضغط زر الطاقة الكهربائية الرئيسي لتشغيل/ايقاف جهاز التلفزيون.
- اذا كان التلفزيون في حالة استعداد للتشغيل (المبيّن بلون احمر)، اضغط زر الطاقة الكهربائية الموجود على وحدة التحكم عن بعد لتشغيل التلفزيون.

استعمال/الاهتمام بوحدة التحكم عن بعد

- ادخل البطاريات ذات النوع الصحيح داخل حجرة البطاريات.
- تأكد من ادخال البطاريات مع مراعاة ان تكون الاقطاب بالاتجاه الصحيح.

01-05/14-21PT2110/Ar 5 4/24/03, 22:28

Downloaded from www.Manualslib.com manuals search engine

Getting to know your telephone

Receiver
Adjust the tilt of the screen
Alcatel-Lucent IP Touch 4028 Phone
Socket for connecting headphones or a handsfree/speaker unit
Alphabetic keypad

■ **LED**
- Green flashing: arrival of an internal call.
- Orange flashing: arrival of an external call.
- Red flashing: priority or alarm call.

■ **Audio keys**

END key: to terminate a call.

Handsfree/Speaker Key: to make or answer a call without lifting the receiver.
- **Lit** in handsfree mode or headset mode (short press).
- Flashing in speaker mode (long press).

Intercom/Mute key
- During a call:press this key so that your party cannot hear you .
- Terminal idle:press this key so that you can automatically answer a call without lifting the receiver.

To adjust the speaker or receiver volume up or down

■ **Extension unit**



An extension unit can be fitted to your telephone. This provides additional keys which can be configured as feature keys, line keys, call keys etc.
To affix labels: push the holding strip of the unit backwards to you and lift it. Install the label under the keypad, in the housing designed for, and place the keypad back into position.

■ **Display and display keys**
Contains several lines and pages providing information on calls and the features accessible via the 10 keys associated with the words on the screen.

Forward icon: pressing the key next to this icon allows you to program or change the forward feature.

Receiver connected. **Appointment programmed.**

Silent mode enabled. **Telephone locked.**

Display keys: pressing a display key activates the feature shown associated with it on the screen.

■ **Navigation**

OK key: used to validate your choices and options while programming or configuring.

Left-right navigator: used to move from one page to another.

Up-down navigator: used to scroll through the content of a page.

Back/Exit key: to return to previous menu (short press) or return to first screen (long press): during a call, provides access to welcome screens (Menu, Info, ..) and to return to the call icon screens.

■ **Welcome screens**



Menu page: contains all features and applications accessible via the keys associated with the words on the screen.
Main page: contains call line keys (allowing supervision of calls) and programmable call keys.

Info page: contains information on the telephone and the status of its features: name, telephone number, number of messages, activation of forwar feature, appointment reminder, etc.

■ **Call display**

Incoming call

Call in progress or outgoing call

Call on hold

If you get two calls at the same time, you can switch from one call to the other by pressing the display key associated with each call

Left-right navigator: used to check calls

■ **Feature keys and programmable keys**

Guide key: used to obtain information on features of the 'menu' page and to program key of the 'main' page.

Messaging key to access various mail services:
If the key flashes, a new voice message or a new text message has been received.

'Redial' key: to access the 'Redial' feature.

Hold: the call is placed on hold.
Transfer: transfer the call to another number.

Downloaded from www.Manualslib.com manuals search engine

Operating the digital timer

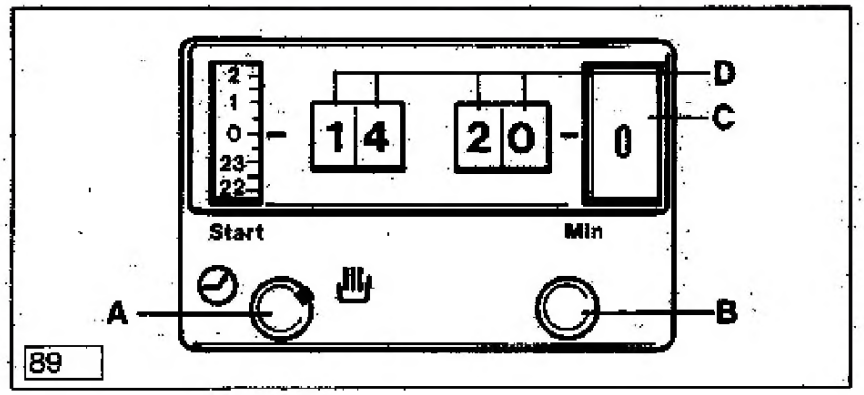

Setting the time of day

– Pull knob B and release, the digits rotate in display D of the clock.

– When the correct time appears in display D, push in knob B.

You should also be aware of the following:

For manual operation of the oven the change-over switch A has to face the hand symbol ✋.

– Select the cooking option and the temperature you want.

Setting the minute minder

– Press knob B and hold depressed until the required time shows next to the marker in display C. Release knob B and the time is counting down in display C.

You should also be aware of the following:

When the selected time has elapsed you will hear an audible signal which will switch off automatically after approximately 2 minutes. To switch this off manually press knob B until "0" shows against the marker in display C.

Downloaded from www.Manualslib.com manuals search engine

⊂ : repetición de todas las pistas

↓

sin reproducción repetida (reproducción normal)

Nota

Cuando el aparato está en el modo E•A•S•S de 12 o de 48 segundos, si se oprime el PLAY MODE al final de la canción para seleccionar el otro modo de reproducción, el aparato puede no cambiar correctamente al otro modo.

CONEXION DE UN APARATO A UN EQUIPO EXTERNO → M

Utilice un cable de conexión en venta en los comercios del ramo, con una minitoma estéreo de diám. 3,5 ø en una punta y dos tomas fonográficas en la otra punta. Conecte la minitoma estéreo en la toma PHONES/LINE OUT del aparato y conecte las tomas fonográficas en los terminales de entrada analógica del aparato exterior, por ejemplo el amplificador o el equipo con el amplificador integrado. Se puede escuchar el sonido del disco compacto por el sistema de audio conectado.

Notas

- Desconecte ambos aparatos antes de hacer esta conexión.
- NO conecte las entradas PHONO de un amplificador (con un fonoecualizador-amplificador incorporado).
- Ajuste el volumen y el DSL de este aparato.

MANTENIMIENTO

Para limpiar la lente → N

Si la lente está sucia, puede haber saltos en el sonido o no reproducir. En este caso limpie la lente de la siguiente forma.
Para limpiar el polvo o las partículas sucias, utilice primero un cepillo con soplador para cámaras fotográficas ⓐ para soplar varias veces y desalojar las partículas de polvo pegadas y cepillar suavemente la lente ⓑ. Termine soplando nuevamente sobre la lente.
Para limpiar las huellas dactilares, utilice un algodón empapado en una solución de limpieza. Limpie suavemente desde el centro a los bordes. Hay líquidos de limpieza en venta en los comercios.

Notas

- Limpie cuidando de no mojar demasiado el algodón ya que el líquido puede penetrar en el aparato y dañarlo.
- No frote con fuerza el algodón porque puede rayar o romper la lente.

Para limpiar los discos → O

Antes de reproducir, limpie el disco del centro hacia afuera con un paño de limpieza. Después de reproducir, guarde el disco en su caja.

ESPECIFICACIONES

Sistema de seguimiento	3 haz láser
Receptor de láser	Láser semiconductor
Conversión D/A	Filtro digital con sobremuestreo de 8 veces + 1 bit de conversión digital analógica
Respuesta de frecuencia	20 – 20.000 Hz (47 k ohmios)
Toma de salida	Toma PHONES/LINE OUT (minitoma estéreo)
Salida máxima	12 mW + 12 mW (16 ohmios a 1 kHz) 500 mV (47 k ohmios a 1 kHz)
Alimentación eléctrica	CC de 3 V utilizando dos pilas alcalinas AA (LR6) CC de 2,4 V con baterías recargables vendidas en los comercios del ramo CA del hogar utilizando el adaptador de CA incluido
Máximas dimensiones exteriores	134 (An.) × 30 (Al.) × 140 (Prof.) mm (excluyendo las partes salientes y controles)
Peso	Aprox. 277 g sin pilas
Accesorios	Adaptador de CA AC-D603 (1) Auriculares estéreo (1) Caja de transporte (sólo XP-SP921) (1)
Adaptador de CA AC-D603	Entrada nominal: CA de 120 V, 60 Hz

Las especificaciones y aspecto de este aparato están sujetos a cambios sin previo aviso.

ADVERTENCIA:
El producto que ha comprado puede funcionar con baterías de níquel cadmio reciclables. Al final de su vida útil, varias leyes estatales y locales prohiben deshacerse las baterías en la basura municipal.
Llame al 1-800-289-2492 para más detalles sobre el reciclado de estas baterías.



pas de lecture répétée (lecture normale)

Remarque

Quand l'appareil est en mode E•A•S•S 12 ou 48 secondes, le changement de mode ne s'effectuera pas correctement si PLAY MODE est pressé à la fin de la plage pour sélectionner un autre mode de lecture.

RACCORDEMENT A UN APPAREIL EXTERIEUR → M

Utilisez un cordon de raccordement ordinaire disponible dans le commerce á miniprise stéréo 3,5 ø á une extrémité et deux prises phono á l'autre.
Branchez la mini-fiche stéréo sur la prise PHONES/LINE OUT de l'appareil et raccordez les fiches phono aux bornes d'entrée analogique d'un appareil extérieur, tel qu'amplificateur ou équipement avec amplificateur intégré. Le son CD sera audible via le système audio raccordé.

Remarques

- Mettez les deux appareils hors tension avant le raccordement.
- NE CONNECTEZ PAS aux entrées PHONO d'un amplificateur (á égalisateur amplificateur phono intégré).
- Ajustez le volume et le DSL sur cet appareil.

MAINTENANCE

Pour nettoyer la lentille → N

Si la lentille est sale, le lecteur sautera ou ne jouera pas. Dans ce cas, nettoyez la lentille de la manière suivante.
Pour éliminer la poussière ou des particules séches, utilisez d'abord un soufflet/brosse ⓐ pour objectif d'appareil photo et soufflez plusieurs fois pour détacher les particules, puis brossez doucement la lentille ⓑ pour la nettoyer. Finissez en soufflant encore une fois la lentille.
Pour éliminer les empreintes de doigts, utilisez une ouate de coton humectée de solution de nettoyage pour lentilles. Essuyez doucement du centre vers les bords. Des solutions de nettoyage pour lentilles sont disponibles dans le commerce.

Remarques

- Evitez de mettre trop de solution sur l'ouate de coton; elle pourrait couler dans l'appareil et causer des dommages.
- Appuyer trop fort avec l'ouate pourrait rayer ou briser la lentille.

Pour nettoyer les disques → O

Avant la lecture, essuyez le disque du centre vers la périphérie avec un chiffon de nettoyage. Aprés le jeu, rangez le disque dans sa boîte.

SPECIFICATIONS

Système de recherche	Laser 3 faisceau
Tête de lecture laser	Laser semi-conducteur
Conversion N-A	Filtre numérique à suréchantlllonage 8 fois + convertisseur N-A 1 bit
Réponse de fréquence	20 á 20.000 Hz (47 k ohms)
Sortie	Prise PHONES/LINE OUT (miniprise stéréo)
Puissance maximum	12 mW + 12 mW (16 ohms à 1 kHz) 500 mV (47 k ohms à 1 kHz)
Alimentation	3 V c.c. avec deux piles alcalines format AA (LR6) 2,4 V c.c. avec des piles rechargeables disponibles dans le commerce Secteur avec l'adaptateur secteur fourni
Dimensions extérieure maximales	134 (l) × 30 (h) × 140 (p) mm (parties et commandes en saillie exclues)
Poids	Env. 277 g, piles exclues
Accessoires	Adaptateur secteur AC-D603 (1) Ecouteurs stéréo (1) Sac de transport (XP-SP921 seulement) (1)
Adaptateur secteur AC-D603	Entrée nominale: 120 V CA, 60 Hz

Les spécifications et l'aspect extérieur de cet appareil sont sujets á modification sans préavis.

AVERTISSEMENT:
Le produit que vous avez acheté peut fonctionner sur piles nickel-cadmium recyclables. Certains états et des lois locales interdisent leur mise au rebut dans les ordures ménagères municipales à la fin de leur vie de service.
Faites le 1-800-289-2492 pour obtenir des informations sur le recyclage de ces piles.



Downloaded from www.Manualslib.com manuals search engine

FUNCTIONS OF TV CONTROLS

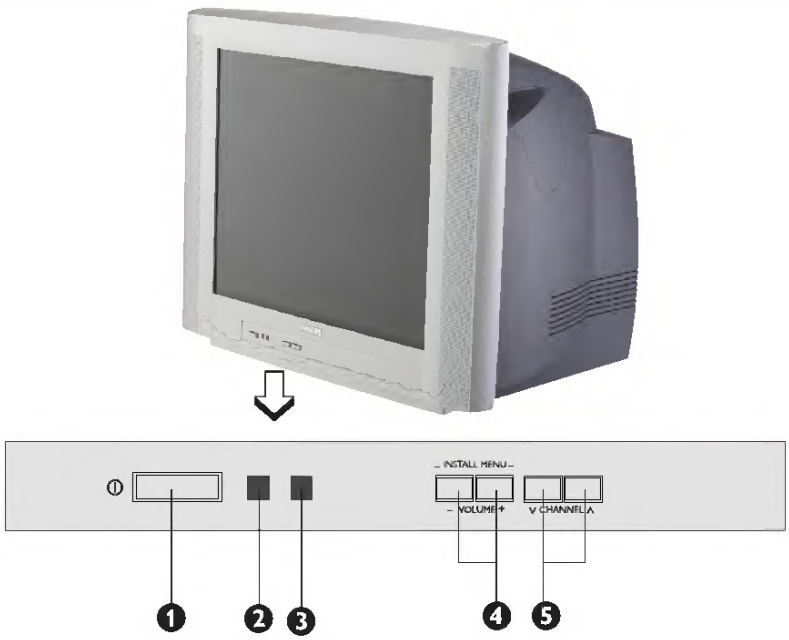

1	Mains Power button	Switch mains power on or off.
2	Standby light indicator	Indicate red light when standby mode is activated.
3	Remote Sensor	Acts as a sensor for activating the controls of the TV when remote control handset is aimed at it.
4	Volume + / – buttons	Adjust sound volume softer/louder.
5	Channel ∨ / ∧ buttons	Select channel in descending/ascending order.

Note

- You can enter the main menu by pressing both the Volume — and + buttons at the same time.
- Press the Channel ∨ or ∧ button to select the next item on the menu.
- Press Volume — or + button to access sub-menu and adjust the settings.

5-11_21PT1323/71/E 9 05/14/03, 5:40 PM

Downloaded from www.Manualslib.com manuals search engine

4. From the "**Display properties**" window, select the "**Settings**" tab. Click the "**Advanced Properties**" button in the bottom right corner.

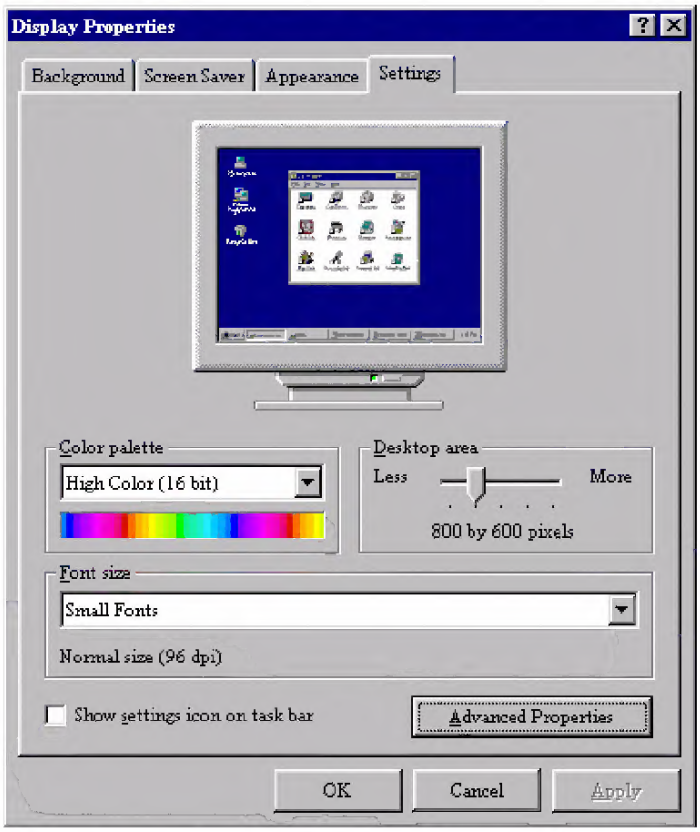

5. Select the "**Monitor**" tab. Click the "**Change**" button in the top right corner.

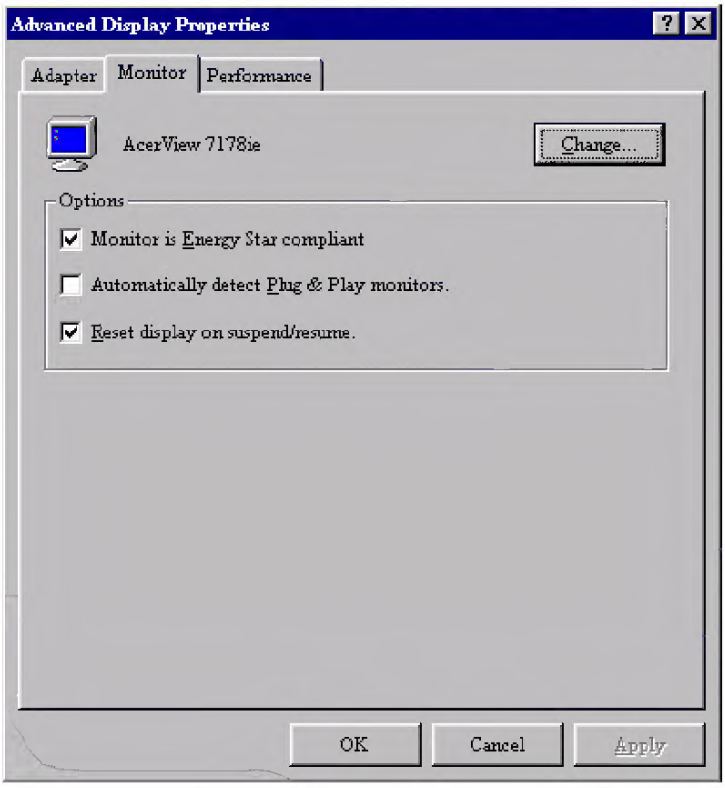

Downloaded from www.Manualslib.com manuals search engine

Colour & Day/Night Cameras

SANYO's range of Colour and Day/Night cameras are perfect for a host of different applications

VCC-6585P/6580P H/G/B

High-resolution Colour Camera

- 1/3" CCD 540Tvl Resolution
- Minimum Illumination 0.5lx (F1.2, Gain High)
- 2 mode Backlight Compensation
- 8 mode Electronic Shutter Speeds (VCC-6580P only)
- Electronic iris
- CS mount
- DC iris lens only
- DC12-15V/AC24V (VCC-6585P)
- AC220-230V (VCC-6580P)

VCC-8695P/8690P DAY/NIGHT

High-Resolution Colour/Mono Camera

- 1/3" CCD 540Tvl Resolution
- Automatically switch to B/W (non IR sensitive)
- Colour / DN setting selectable
- Minimum Illumination 0.25lx (B/W F1.2, Gain High) 0.35lx (colour)
- 2 mode Backlight Compensation
- 9 mode Electronic Shutter Speeds (VCC-8690P only)
- Electronic Iris
- CS mount
- DC iris lens only
- DC12-15V/AC24V (VCC-8695P)
- AC220-230V (VCC-8690P)

VCC-4750P / 4795P DAY/NIGHT

High Resolution Day/Night Camera

- 1/3" CCD 540Tvl Resolution
- IR sensitive with mechanical IR Cut filter release
- Minimum Illumination 0.01lx (B/W F1.2, Gain High) 0.45lx (colour)
- 2 mode Backlight Compensation
- 7 mode Electronic Shutter Speeds
- Electronic Iris
- CS mount
- DC iris lens only
- DC12-15V/AC24V (VCC-4795P)
- AC220-230V (VCC-4750P)

VCC-WD8575P WD DAY/NIGHT VAC 7U

Wide Dynamic Range Day/Night Camera

- 1/3" CCD 480Tvl Resolution
- Dual exposure wide dynamic mode (64dB)
- IR sensitive with mechanical IR Cut filter release
- Minimum Illumination 0.05lx (B/W F1.2, Gain High) 0.5lx (colour)
- 2 mode Backlight Compensation
- 7 mode Electronic Shutter Speeds
- Electronic Iris
- 40x Sensitivity Boost
- 2.5x Digital Zoom upon Alarm In / Motion detection
- Alarm out upon Motion detection
- External Alarm terminal In (1) Out (1)
- 8 Privacy masking
- Remote Menu set-up by VAC 7U
- CS mount
- DC/Video iris lens
- DC12-15V/AC24V

Downloaded from www.Manualslib.com manuals search engine

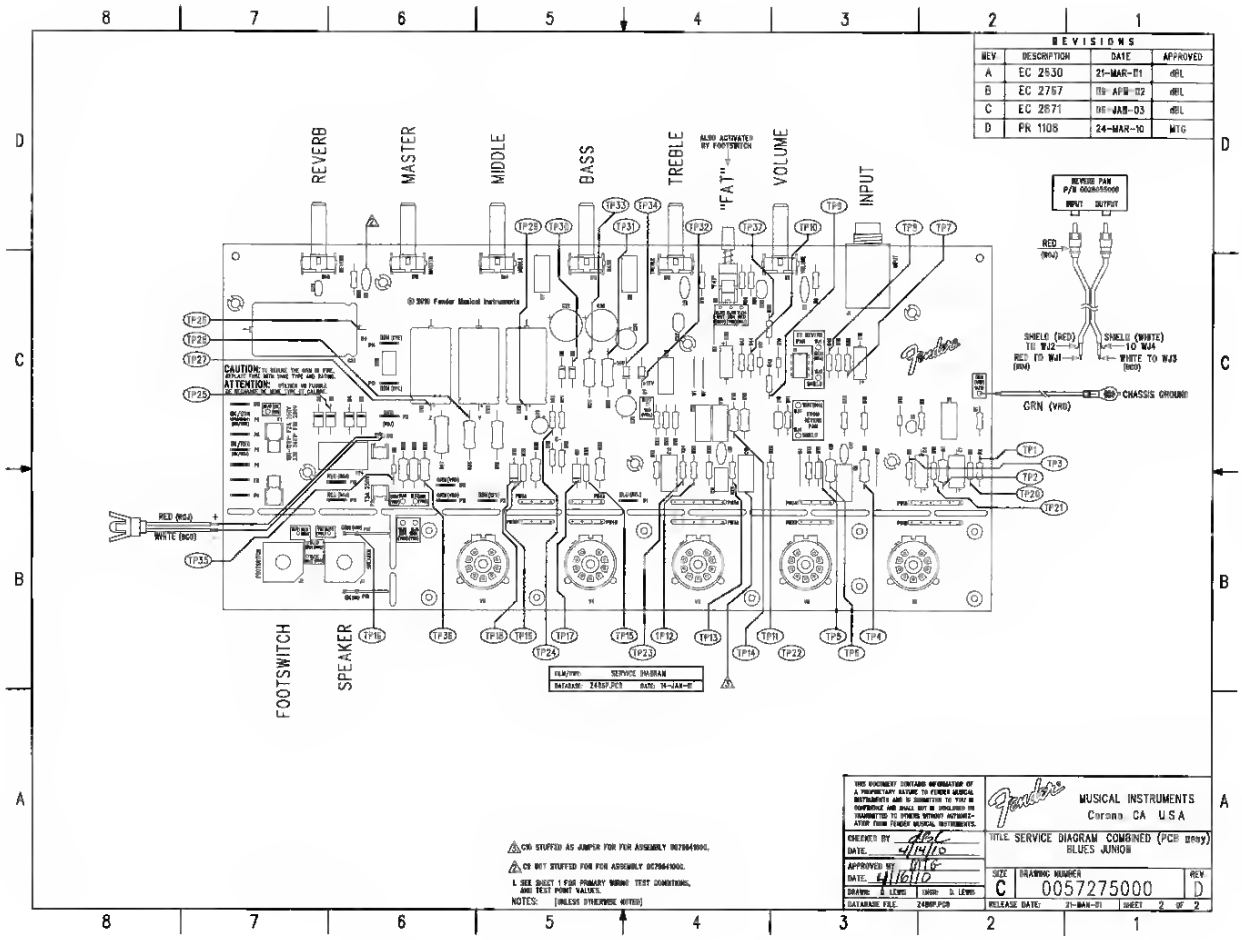

Downloaded from www.Manualslib.com manuals search engine

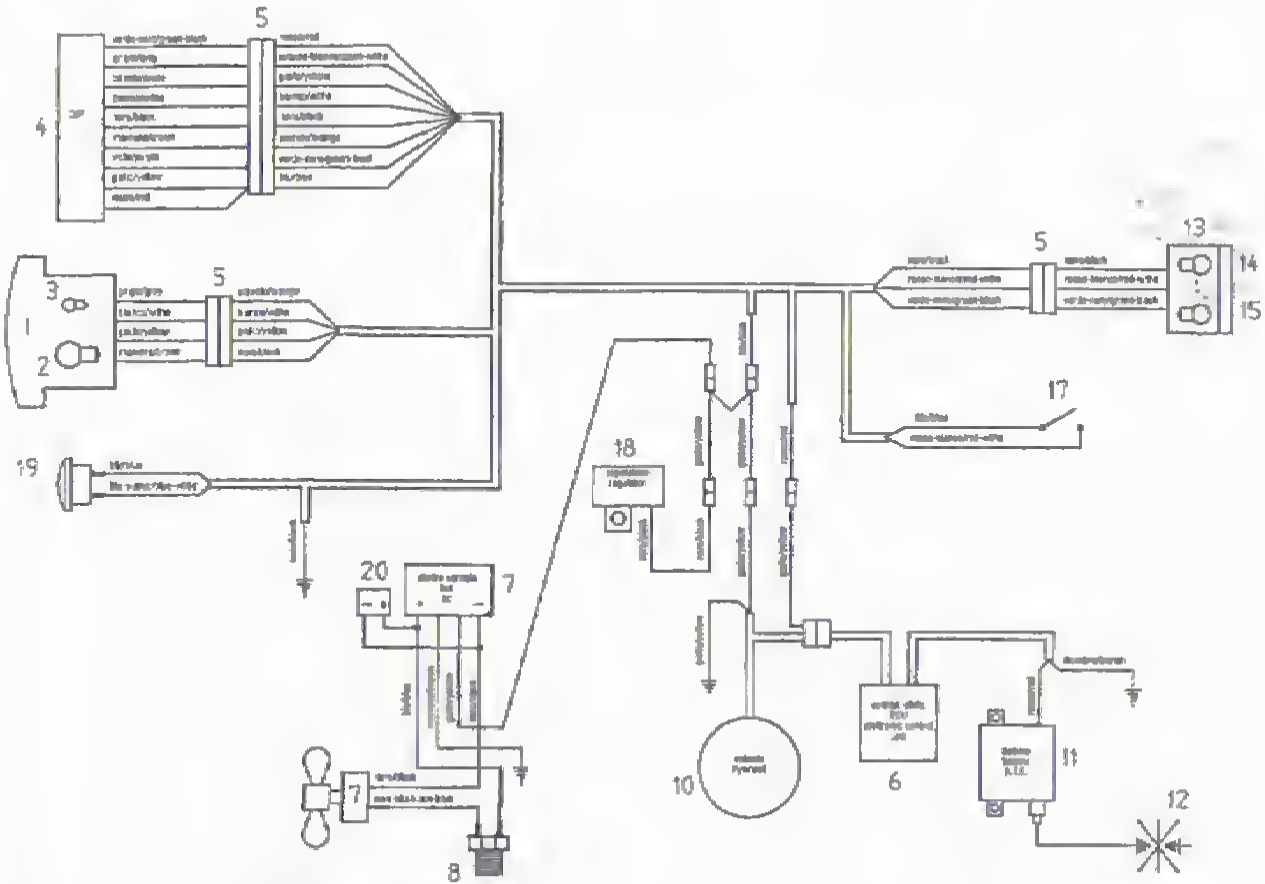

http://www.BCDirtbikes.com

- [Економія енергії]Застосовуються налаштування зображення із низьким рівнем споживання електроенергії.

3 Натисніть кнопку OK, щоб підтвердити вибір.
↳ Буде застосовано вибрані налаштування режиму "розумного зображення".

Встановлення налаштувань зображення вручну

1 Натисніть кнопку ⌂ MENU.

2 Натисніть кнопку OK, щоб вибрати [Зображення]
↳ З'явиться меню [Зображення].

3 За допомогою кнопок ▲▼◀▶ виберіть одне із таких налаштувань.

- [Інтел. зображення]Надається доступ до попередньо встановлених налаштувань режиму "розумного зображення".
- [Контрастність] Дозволяє налаштувати інтенсивність яскравих областей, не змінюючи темних областей.
- [Яскравість] Дозволяє налаштувати інтенсивність і деталі темних областей.
- [Колір] Дозволяє налаштувати насиченість кольору.
- [Тон]Компенсує варіації кольору під час передачі сигналу NTSC.
- [Чіткість] Дозволяє налаштувати рівень чіткості деталей зображення.
- [Зменшення шумів] Фільтрує та зменшує шуми зображення.
- [Відтінок]Дозволяє налаштувати баланс кольору для зображення.
- [Налашт. відтінок]Можна виконати спеціальне налаштування відтінків.
- [Dig.CrystalClear]Цифрове налаштування якості зображення на оптимальну контрастність, колір та чіткість.
- [Динам. контрас.]Автоматично покращує контрастність зображення. Рекомендовано налаштування [Середня]
- [Динам. підсвіч.]Дозволяє налаштувати яскравість підсвітки телевізора відповідно до умов освітлення.
- [Змен. дефек. MPEG]Згладжує перехід кольорів у цифровому зображенні. Цю функцію можна увімкнути або вимкнути.
- [Покращ. кольору]Робить кольори насиченішими та покращує роздільну здатність яскравих деталей. Цю функцію можна увімкнути або вимкнути.
- [Режим ПК]Дозволяє налаштувати зображення, коли комп'ютер під'єднано до телевізора через роз'єми HDMI/DVI/VGA.
- [Формат зобр.]Дозволяє змінити формат зображення.
- [Гориз. зміщення]Встановлює зображення горизонтально для PC-VGA або YPbPr (EXT2 або EXT3).
- [Верт. зміщення]Встановлює зображення вертикально для PC-VGA або YPbPr (EXT2 чи EXT3).

Зміна формату зображення

1 Натисніть кнопку FORMAT.
↳ Відобразиться панель вибору формату зображення.

2 За допомогою кнопок ▲▼ виберіть формат зображення.
↳ Вибраний формат зображення активовано.

3 Натисніть кнопку OK, щоб підтвердити вибір.

Downloaded from www.Manualslib.com manuals search engine

Step 3 Click on the **Print Test Page** button. Windows should print out a test page.

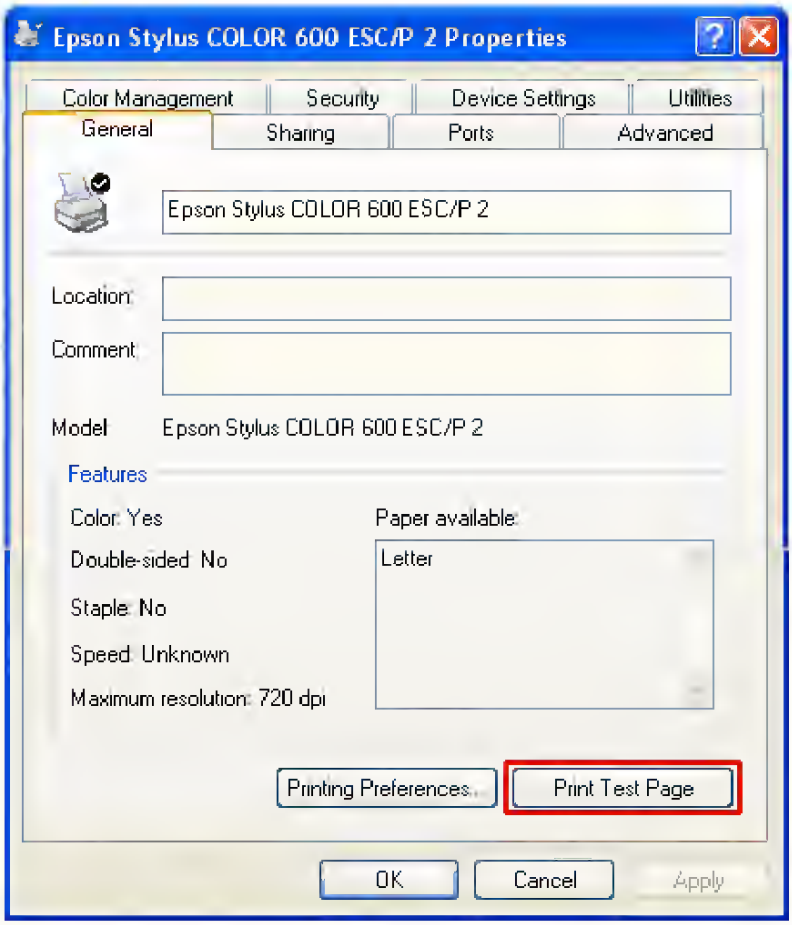

You have successfully configured the Print Server for printing.

Downloaded from www.Manualslib.com manuals search engine

1.3 LCD Specifications

	TPC-66SN	TPC-66T
Display Type	Color STN LCD	TFT LCD
Size (diagonal)	5.7"	5.6"
Maximum Resolution	320 x 240 (QVGA)	
Maximum Colors	4096	256K
Pixel Pitch (W x H)	0.12 x 0.36 mm	
Viewing Angle	100°	100°
Luminance (cd / m2)	400	500
Contrast Ratio	55	400
Operating Temperature	0 ~ 50° C (Ambient)	
Control	Contrast Adjustable	N/A
Backlight	1 CCFL	
Backlight MTBF	75,000 hours	30,000 hours

1.4 Touchscreen Specifications

Touch Type	Resistive
Base Glass Construction	Tempered Glass
Resolution	Continuous
Light Transmission	75% typical
Controller	DMC9000
Power Rating	5 VDC
Software Driver	Windows CE (embedded)
Durability	10 million times with a 8 mm diameter silicone rubber finger

Note *There is no pointer/cursor shown using the touch screen. The cursor only appears when closing or minimizing the window.*

Downloaded from www.Manualslib.com manuals search engine

4. Click **Next** to continue.

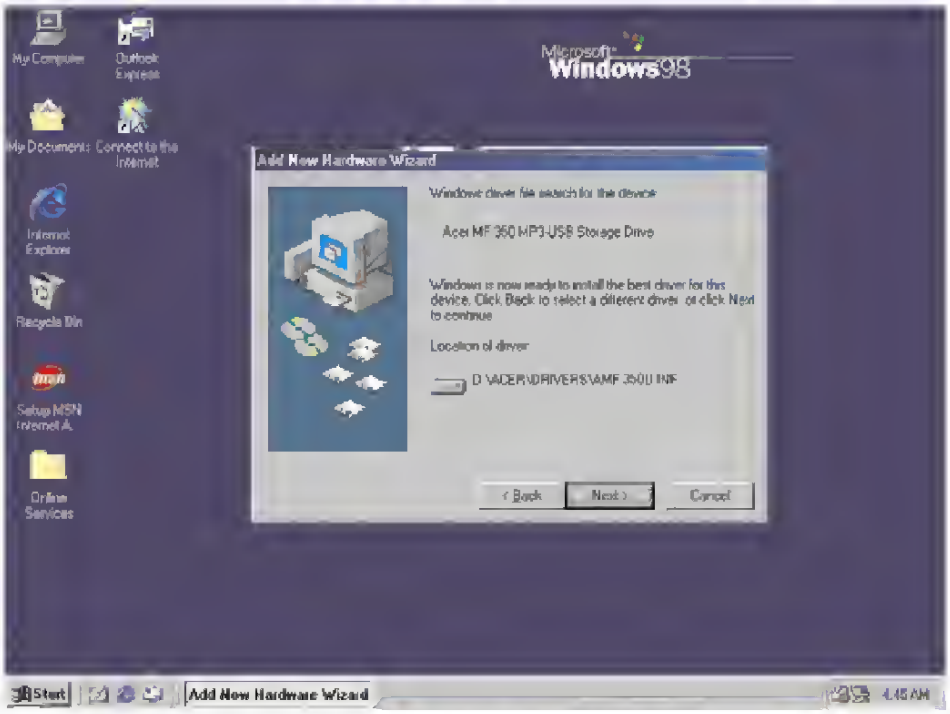

5. Click **Finish**, and the driver is installed successful.

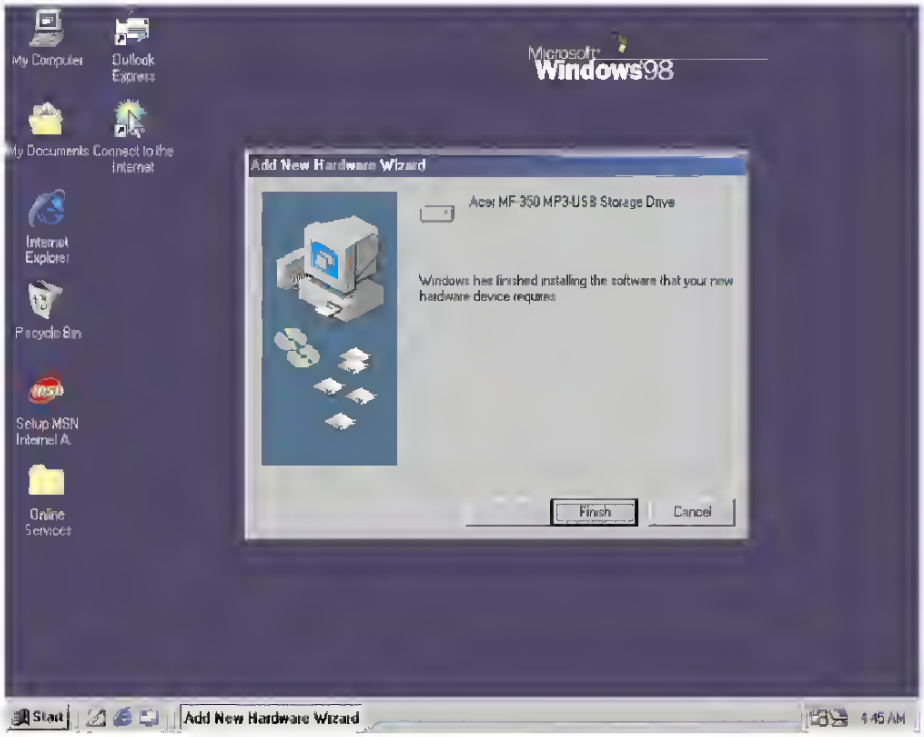

Downloaded from www.Manualslib.com manuals search engine

PORTS & CONNECTORS

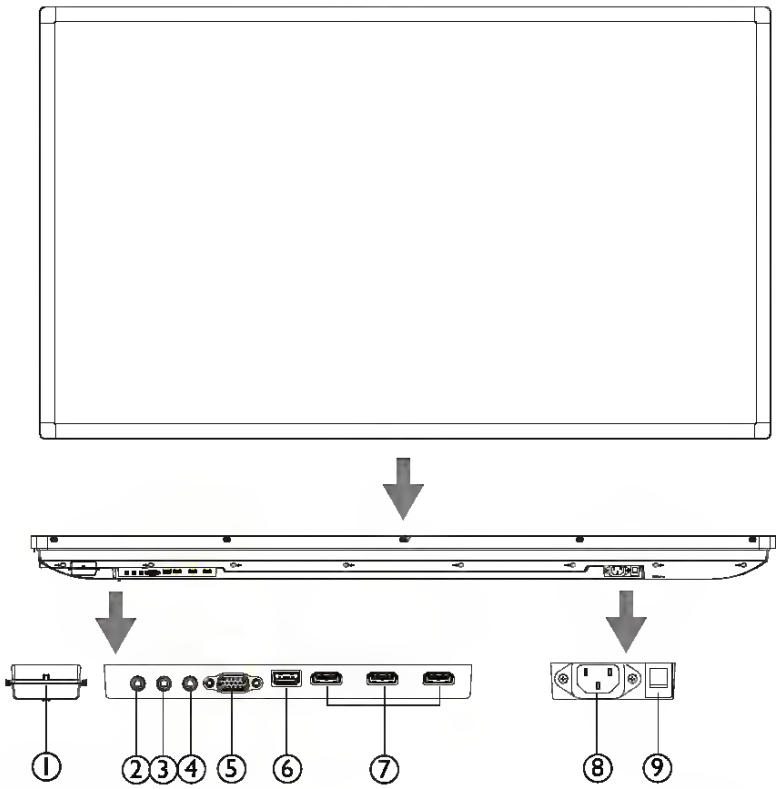

①	**Remote control sensor and Power Indicator**	Receives the signal from the remote control. See also "USING THE REMOTE CONTROL" on page 18. When the display is in active use the power indicator illuminates GREEN. When the display is powered off it illuminates RED. When a component failure is detected, the indicator will blink RED.
②	**IR IN**	Connects to an external IR sensor module to the display.
③	**AUDIO OUT**	Connects to external speakers, audio amplifiers, etc. or outputs the signal that is supplied to the AUDIO IN connector.
④	**AUDIO IN (LINE IN)**	Connects with the audio out connector of a video source such as a computer, VCR, or DVD player when the display is connected to the source via the **D-SUB** connector.
⑤	**D-Sub (VGA IN)**	Connects with the analog video output (VGA) of a computer or other RGB equipment. This input can be used with an RGB or COMPONENT source.
⑥	**USB port**	Connects to a personal computer or USB 2.0 device to display digital media.
⑦	**HDMI IN**	Connects with devices supporting audio/video data using the digital HDMI interface.
⑧	**AC IN connector**	Connects with the supplied power cord.
⑨	**AC SWITCH**	Switches the main power of the display ON/OFF.

Downloaded from www.Manualslib.com manuals search engine

Playing tracks you have played most frequently in random order (Auto ranking shuffle play)

The CD player plays up to 32 tracks which the player has automatically memorized as the most frequently played ones. In Auto ranking shuffle play, these tracks are played in random order.

Perform steps 1 and 2 of "Selecting playback options" (page 16), press ∧ or ∨ to select "RANKING SHUF," then press ►II/ENT to enter the selection.

Note

The CD player memorizes the tracks you have played from up to 10 CDs, whether you have changed the CDs or not. If the CD player tries to memorize tracks from an 11th CD, the data memorized first will be erased.

Playing tracks in your favorite order (PGM play)

You can program the CD player to play up to 64 tracks in your favorite order.

1 While play is stopped, perform steps 1 and 2 of "Selecting playback options" (page 16), press ∧ or ∨ to select "PROGRAM," then press ►II/ENT to enter the selection.

2 Press I◄◄ or ►►I to select the track and press DSPL/MENU to enter the selection.

The track has been stored in memory. When playing an ATRAC CD/MP3 CD, you can also select a group using 🗀 + or 🗀 –.

[Audio CD]

Track number Playing order

[CD-TEXT]

Track name

Track number

[ATRAC CD/MP3 CD]

Playing order File name

(Continued)

Kabel „AP5.x peripheral“ Spender / Cables AP5.x peripheral dispenser

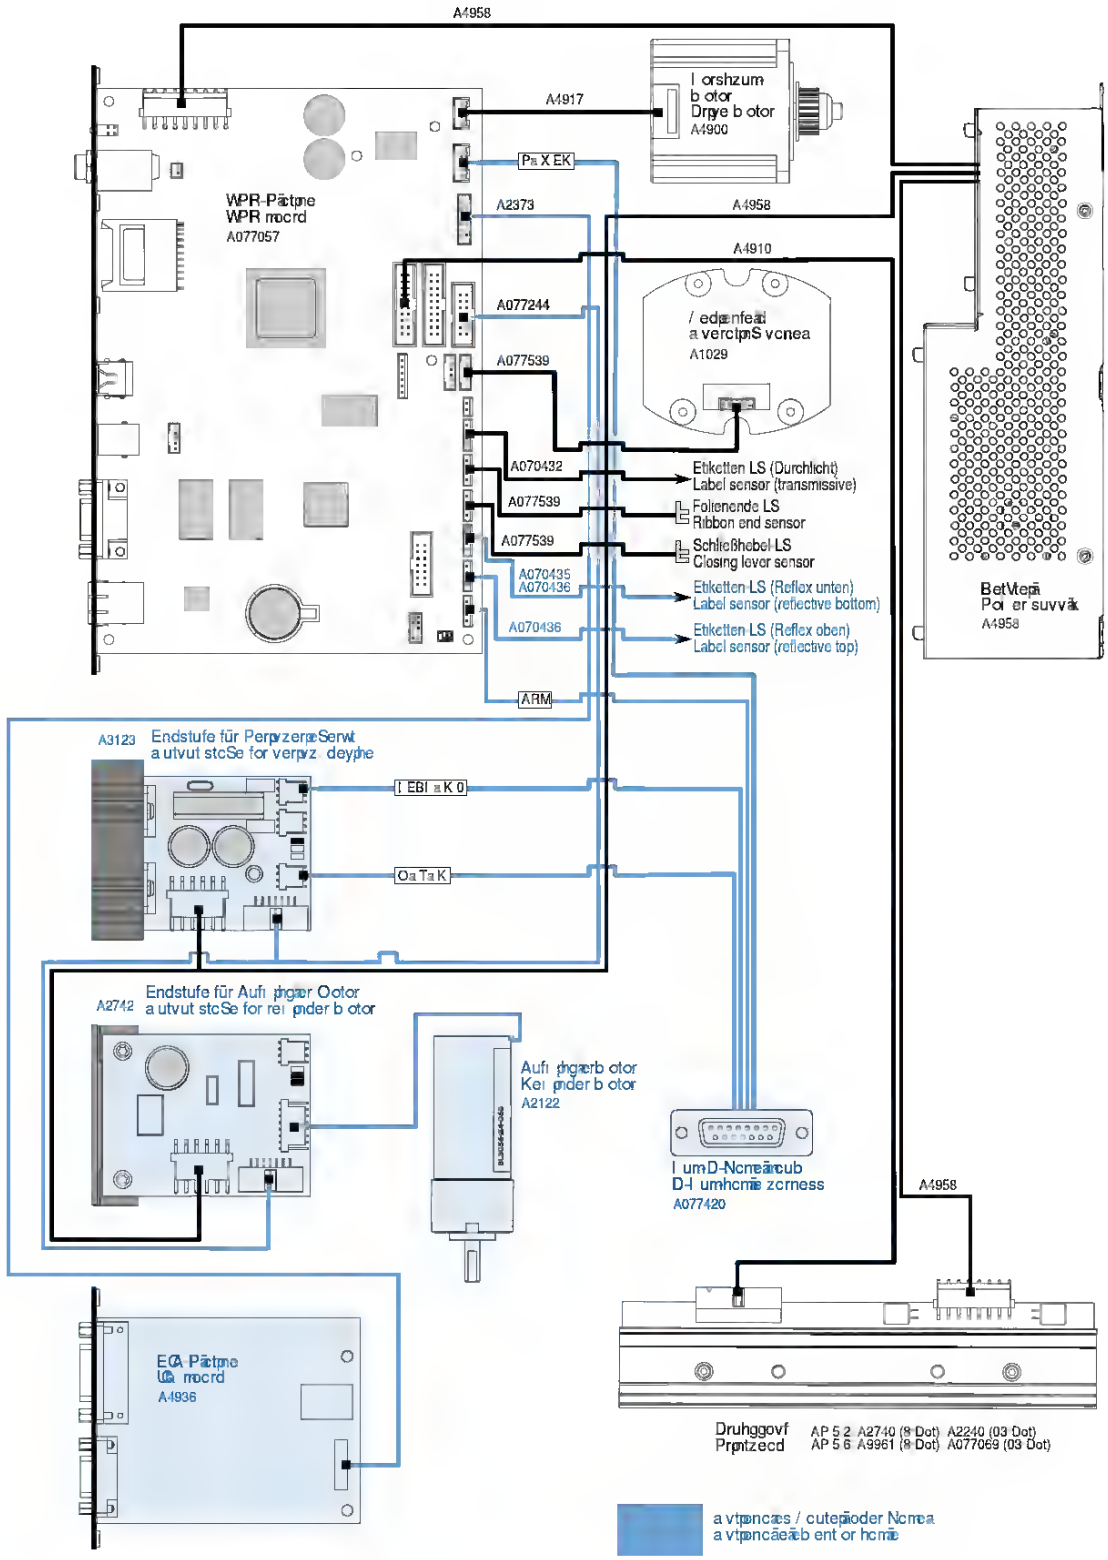

Downloaded from www.Manualslib.com manuals search engine

General Hints

- After a clock function has been set, the desired times can be set or changed within 5 seconds using the ⊕ or ⊖ buttons.
- "P" indicates that the clock is running at 60 Hz.
- **After using the Cook Time ⊢-/End ⊣ function has been used, the oven must be switched from Automatic to Manual operation by pressing the ✋ button.**

Downloaded from www.Manualslib.com manuals search engine

ADVERTENCIA

PARA REDUCIR EL RIESGO DE INCENDIOS O SACUDIDAS ELECTRICAS, NO EXPONGA ESTE APARATO A LA LLUVIA NI A LA HUMEDAD.

"CAUTION TO REDUCE THE RISK OF ELECTRIC SHOCK,
DO NOT REMOVE COVER (OR BACK).
NO USER-SERVICEABLE PARTS INSIDE.
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL."

Explicación de los símbolos gráficos:

El símbolo del rayo con punta de flecha, en el interior de un triángulo equilátero, tiene la finalidad de avisar al usuario de la presencia de "tensiones peligrosas" sin aislar en el interior del producto que podrían ser de suficiente magnitud como para constituir un riesgo de sacudida eléctrica para las personas.

El signo de exclamación en el interior de un triángulo equilátero tiene la finalidad de avisar al usuario de la presencia de instrucciones de operación y mantenimiento (reparación) en el material impreso que acompaña al aparato.

Anotación del propietario

Pare su conveniencia, anote el número de modelo y el número de serie (los encontrara en el panel trasero de su aparato) en el espacio suministrado más abajo. Menciónelos cuando se ponga en contacto con su concesionario Aiwa en caso de tener dificultades.

N.° de modelo	N.° de serie (N.° de lote)
CX-NA303	
SX-NA302	
SX-R275 (NSX-A304 solamente)	

PRECAUCIONES

Lea cuidadosa y completamente el manual de instrucciones entes de utilizar la unided. Asegúrese de guerder el manual de instrucciones para utilizarlo como referencia en el futuro. Todas las edvertencias y precauciones del manual de instrucciones y de la unidad deberán cumplirse estrictamente, así como también las sugerencias de segurided mencionades més abajo.

Instalación

1 **Agua y humedad** — No utilice esta unided cerca del agua como, por ejemplo, cerca de une bañere, una palangane, una piscina o algo similar.

2 **Celor** — No utilice esta unided cerca de fuentes de calor, incluyendo salidas de aire caliente, estufas u otros aparetos que generen calor.
No deberá colocarse tampoco en lugeres donde le temperatura sea inferior a 5°C o superior a 35°C.

3 **Superficie de montaje** — Ponge la unided sobre una superficie plana y nivelada.

4 **Ventilación** — La unided deberá situerse donde tenga suficiente especio libre a su alrededor, para que la ventilación apropiada quede asegurada. Deje un espacio libre de 10 cm por le perte posterior y superior de la unided, y 5 cm por cada lado.
- No ponga la unidad sobre una cama, una alfombra o superficies similares que podrían tapar las aberturas de ventilacion.
- No instale la unidad en una librería, mueble o estentería cerreda hermeticamente donde la ventilación no sea adecuada

5 **Entrada de objetos y líquidos** — Tenge cuidedo de que objetos y líquidos no entren en la unidad por las aberturas de ventilacion.

6 **Carros de mano y soportes** — Cuando ponge o monte la unided en un soporte o carro de mano, ésta deberá moverse con mucho cuidado
Las paradas repentinas, la fuerze excesiva y las superficies irreguleres pueden hacer que la unidad o el carro de mano se dé vuelta o se caiga.

7 **Condensación** — En la lente del fonocaptor del reproductor de discos compactos tal vez se forme condensación cuando:
- La unidad se pase de un luger frío a uno caliente.
- El sisteme de calefección se acebe de encender.
- La unidad se utilice en una habitacion muy húmeda.
- La unidad se enfríe mediante un acondicionador de aire.
Esta unidad tel vez funcione mal cuando tenga condensación en su interior. En este caso, deje en reposo la unidad durante unas pocas horas y repita de nuevo la operación.

8 **Montaje en pared o techo** — La unidad no se deberá monter en una pered ni en el techo, a menos que se especifique lo contrario en el manual de instrucciones.

Energía eléctrica

1 **Fuentes de alimentación** — Conecte solamente esta unidad a las fuentes de elimentacion especificadas en el manual de instrucciones, y como está marcedo en le unidad.

2 **Polarización** — Como característica de segurided, algunas unidades están equipadas con clavijes de alimentación de CA polarizadas, las cuales sólo se pueden insertar de una forma en les tomas de corriente. Si resulte difícil o imposible insertar la clavija de alimentación de CA en una toma de corriente, dé vuelte e la clavija e inténtelo de nuevo. Si sigue sin poder insertar fácilmente le clavija en la toma de corriente, llame a un electricista cualificado para que modifique o reemplace le tome de corriente. Pare evitar enular le característica de seguridad de la clavija polerizade, no le inserte a la fuerza en una toma de corriente.

Downloaded from www.Manualslib.com manuals search engine

2 Align the memory DIMM with the socket (a). Press the memory DIMM into the socket until the clips lock onto the memory DIMM (b).

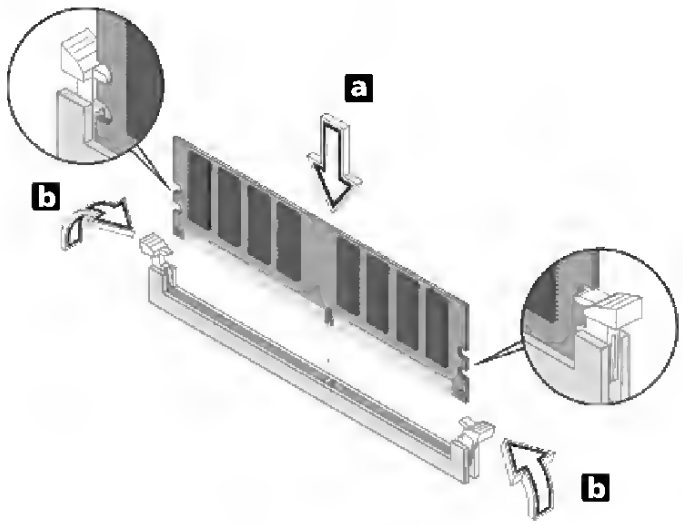

Note: The memory DIMM sockets are slotted to ensure proper installation. If you insert a memory DIMM but it does not fit easily into the socket, turn the memory DIMM around and try to insert it again.

To reconfigure your computer

Your computer automatically detects the amount of memory installed. Run the BIOS utility to view the new value for total system memory and make a note of it.

Replacing the hard disk

Follow these steps to replace your computer's hard disk:

1 Remove the computer cover.

2 Detach all cables connected to the hard disk and pull the hard disk out.

3 Remove the drive rails that hold the hard disk to the disk frame and detach the hard disk. Set the drive rails aside.

4 Insert the new hard disk into the frame and secure it with drive rails.

5 Reattach all cables to the new hard disk.

Downloaded from www.Manualslib.com manuals search engine

4.6 CONTRAST

Step 1: Press MENU to enter the menu selection.

Step 2: Press PLAY to select the "CONTRAST" option.

Step 3: Press PLAY to select the contrast level you prefer.

There are 16 levels to choose from.

4.7 LANGUAGE

Step 1: Press MENU to enter the menu selection.

Step 2: Press PLAY to select the "LANGUAGE" option.

Step 3: Press PLAY to select the display language.

There are three modes to choose from:

1. 中文简体
2. 中文繁體
3. ENGLISH

4.8 VERSION

Step 1: Press MENU to enter the menu selection.

Step 2: Press PLAY to select "VERSION" to see the version.

Note: The version of the software refers to the machine.

4.9 SN

Step 1: Press MENU to enter the menu selection.

Step 2: Press PLAY to select the "SN" option to see the serial

Downloaded from www.Manualslib.com manuals search engine

Management (Computer / Video Mode)

Lamp Mode

- ECO : Selecting "ECO" mode to dim the projector Lamp, which lower power consumption, will extend the lamp life and reduce noise.
- Standard : Apply " Standard " mode to reurn normal operation.
- Enhanced : Choosing "Enhanced " mode will brighten the projector Lamp to get a brighter screen.

Menu Location

Choose the Menu location on the display screen.

Projection

- **Front-Desktop**

  The factory default setting.

- **Rear-Desktop**

  When you select this function, the projector reverses the image so you can project behind a translucent screen.

- **Front-Ceiling**

  When you select this function, the projector turns the image upside down for ceiling-mounted projection.

- **Rear-Ceiling**

  When you select this function, the projector reverses and turns the image upside down at same time. You can project from behind a translucent screen with ceiling mounted projection.

Downloaded from www.Manualslib.com manuals search engine

Installation horizontale

1 Construction

Pour les détails sur ⓐⓑⓒ... voir la page 3.

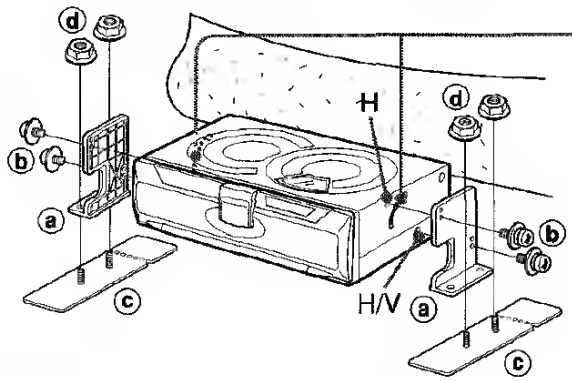

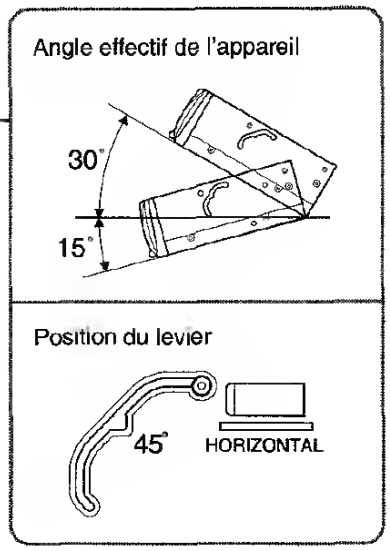

Remarque

Si la surface de montage doit être renforcée, fixer les plaques de soutien ⓒ sur le dessous du coffre de la voiture, etc. avec des vis taraudeuses (non fourni).

2 Sélection de la position

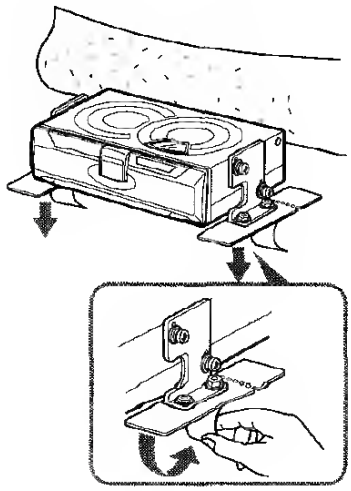

3 Retrait temporaire

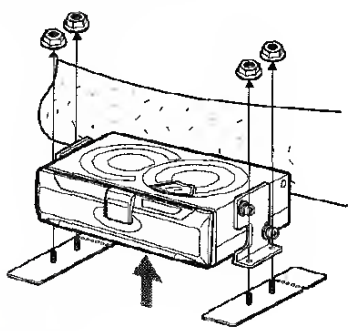

4 Découpage de trous dans la moquette

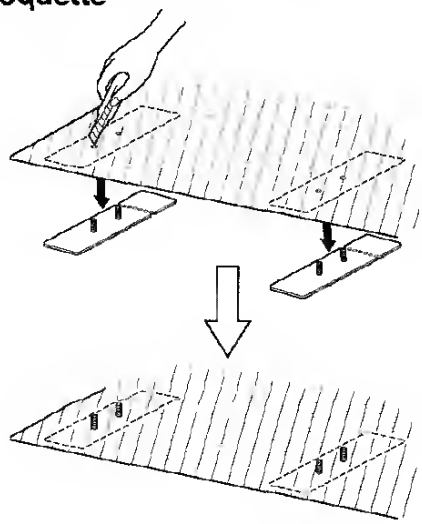

5 Fin

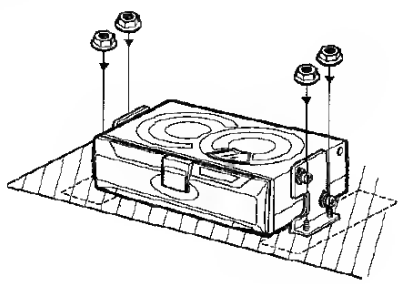

Downloaded from www.Manualslib.com manuals search engine

How to Use the Active Control

The Active Control monitors and adjusts incoming video signals to help provide the best picture quality.

When you choose to turn the Active Control ON, the picture sharpness and noise reduction are controlled automatically. Active Control adjusts these picture settings continuously and automatically.

***NOTE:** Active Control is not available for signals connected to the AV4 inputs.*

1 **Press the MENU button** on the remote control to show the on-screen menu.

2 **Press the CURSOR DOWN button** twice to highlight FEATURES.

3 **Press the CURSOR RIGHT button** and the menu will shift to the left.

4 **Press the CURSOR DOWN button** repeatedly until the ACTIVE CTRL (control) is highlighted.

5 **Press the CURSOR RIGHT or CURSOR LEFT button** repeatedly to toggle the ACTIVE CONTROL ON or OFF.

6 **Press the STATUS/EXIT button** to remove the menu from the screen.

---

7 **You can also press the ACTIVE CONTROL button** on the remote control to toggle the ACTIVE CONTROL ON or OFF.

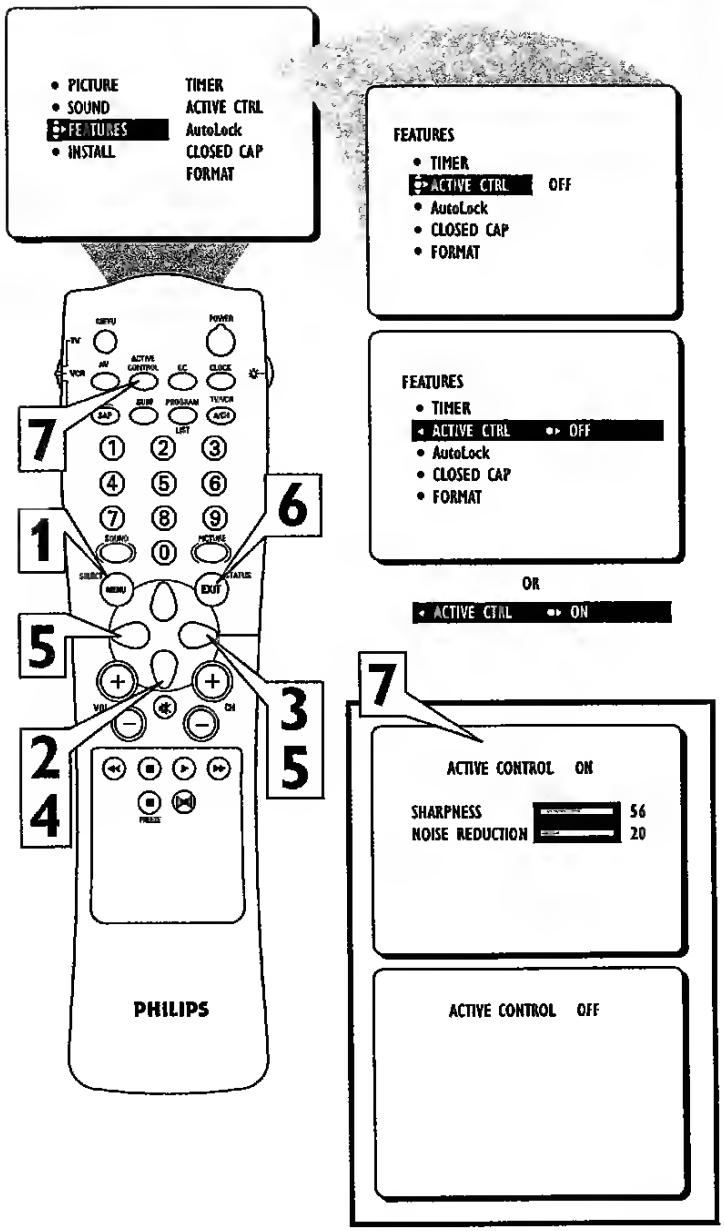

☑ Check It Out

Toggle the ACTIVE CONTROL ON with the remote control and a screen display will appear showing the Active Control in work. You will see the sharpness and noise reduction settings changing to provide the best possible picture quality.

Downloaded from www.Manualslib.com manuals search engine

Calling a contact's internet calling address

You must add an internet calling address to a contact to be able to place an internet call to them.

To make an internet call, from the *Application menu* tap **People**. Tap on the contact to open their profile, and then tap on their internet calling address to place the call.

Note

Many modern internet calling apps automatically "connect" to any of your Android contacts who also have that service. Any connected services will be listed under "connections" in the contact's profile.

Calling a phone number using internet calling

If you have configured your phone to place all calls using internet calling or to ask for each call, you may also call a phone number using internet call, whenever you are connected to a wireless network.

Dial the number and tap , or select the contact you wish to place a call to, then tap the internet call account you want to use to make the call.

Important

Calling a phone number using internet calling requires that your service provider supports it, and may incur additional charges. Please contact your service provider if you have any questions.

Downloaded from www.Manualslib.com manuals search engine

Використання замка Kensington

На задній панелі TV є щілина для замка Kensington. Запобігайте крадіжці шляхом скріплення замком Kensington щілини та стаціонарного предмета, наприклад важкого столу.

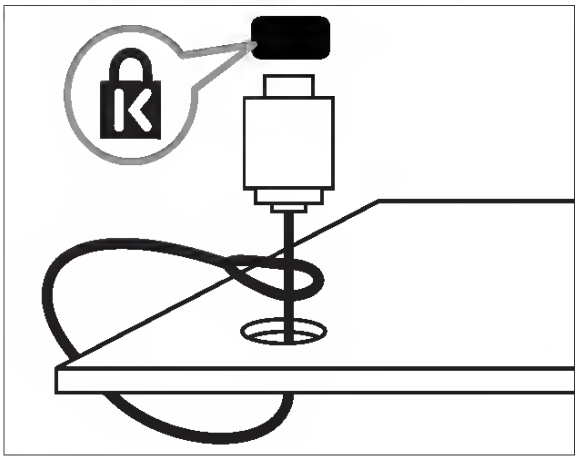

Downloaded from www.Manualslib.com manuals search engine

Troubleshooting

Should any problem persist after you have checked these symptoms, consult your nearest Aiwa dealer.

Symptom	Cause and/or corrective action
The volume does not increase even if you press VOL + repeatedly.	→ AVLS is set to "ON". Set it to "OFF". (page 22)
No sound, or noise is heard.	→ Connect the headphones/earphones firmly. (page 13) → Plugs are dirty. Clean the headphones/earphones plugs with a dry soft cloth periodically.
Certain files cannot be played.	→ You tried to play files saved in a format that is not compatible with this CD player. (page 6)
The playing time is too short when powered with the dry batteries.	→ Check that you are using alkaline batteries and not manganese batteries. (page 25) → Replace the batteries with new LR6 (size AA) alkaline batteries. (page 25)
"Lo batt" appears on the display. The CD does not play.	→ Replace the batteries with new LR6 (size AA) alkaline batteries. (page 25)
"Hi DC in" appears on the display.	→ An AC power adaptor which is rated higher than the one supplied or recommended is being used. Use only the supplied AC power adaptor recommended in "Optional accessories". (page 32)
The CD does not play or "No disc" appears on the display when a CD is placed in the CD player.	→ The CD is dirty or defective. → Check that the CD is inserted with the label side up. (page 13) → Moisture condensation has occurred. Leave the CD player aside for several hours until the moisture evaporates. → Close the lid of the battery compartment firmly. (page 25) → Make sure the batteries are inserted correctly. (pages 25) → Connect the AC power adaptor to an AC outlet securely. (page 13) → Press ▶II/ENT after one second or more has passed since the AC power adaptor was connected. → The CD-R/RW is blank. → There is a problem with the quality of the CD-R/RW, recording device, or application software.

Lower basket with cutlery basket*)

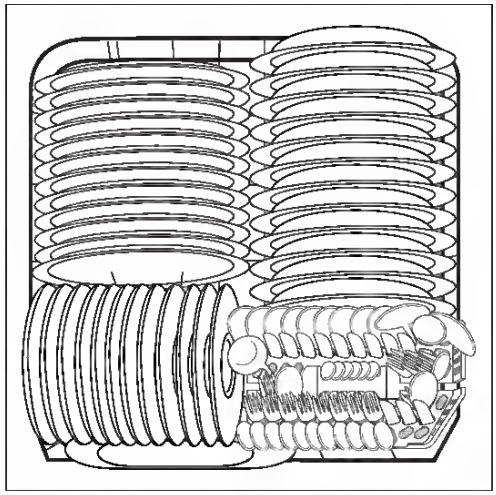

Cutlery basket

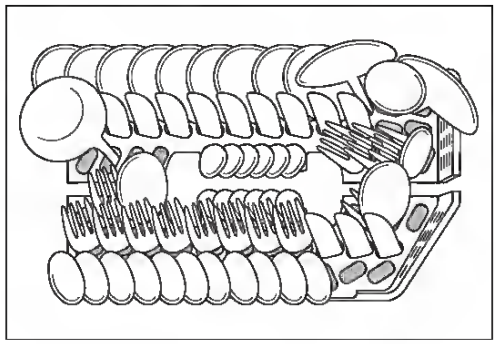

*) If there are cup racks in place on the lefthand side or if beer glass holders are in place, remove them.

Downloaded from www.Manualslib.com manuals search engine

Cómo usar el control de Subtítulos

Subtítulos (CC) le permite leer el contenido hablado de los programas de televisión en la pantalla del TV. Diseñada para ayudar a las personas con discapacidad auditiva, esta función usa "cuadros de texto" en pantalla para mostrar el diálogo y las conversaciones mientras se desarrolla el programa de TV.

COMIENZO

1. Presione el botón CC en el control remoto para mostrar los actuales ajustes de Subtítulos.
2. Presione repetidamente el botón CC para escoger entre las cuatro opciones de Subtítulos (CC No, CC 1, CC 2, CC Mudo). Si el programa sintonizado emite información de CC, en pantalla aparecerán el diálogo (y descripciones) de la acción que se desarrolla en el programa de TV subtitulado.
3. Cuando haya terminado, presione el botón STATUS/EXIT para remover el menú de la pantalla del TV o deje que la opción agote el tiempo y desaparezca de la pantalla del TV.

FIN

Ayuda rápida

No todos los programas de TV y comerciales de productos se hacen con información de Subtítulos (CC). Tampoco se usan necesariamente todos los modos de Subtítulos (CC1 o CC2) durante la transmisión de un programa con subtítulos. Para conocer las estaciones y horarios de los programas subtitulados, consulte las listas de programas de TV de su área.

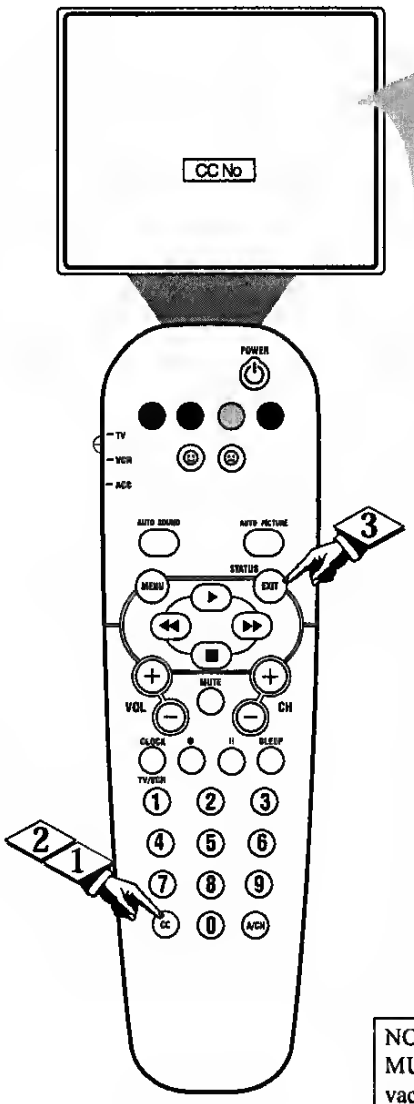

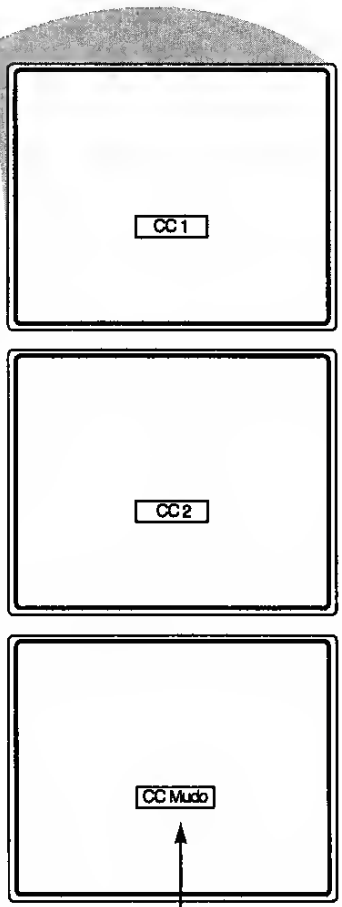

NOTA: Se puede usar la opción CC MUDO para el ajuste del TV en activación del modo Subtítulos (SÍ) cuando se presiona el botón MUTE en el control remoto. Esto activa la opción CC1.

Downloaded from www.Manualslib.com manuals search engine

- Make sure that the printer cable is connected securely to the computer's parallel port or a USB port and the corresponding port on the printer.

I want to set up my location to use the internal modem.

To properly use your communication software (e.g. HyperTerminal), you need to set up your location:

1 Click on **Start**, **Settings**, **Control Panel**.

2 Double-click on **Modems**.

3 Click on **Dialing Properties** and begin setting up your location.

Refer to the Windows manual.

Note: Please note, on first booting your notebook, that you can skip the Internet Connection setup, as it is not necessary to complete the installation of your Operating System. After the Operating System is setup, you can proceed with the Internet Connection setup.

I want to restore my computer to its original settings without recovery CDs.

Note: If your system is the multilingual version, the operating system and language you choose when you first turn on the system will be the only option for future recovery operations.

This recovery process helps you restore the C: drive with the original software content that is installed when you purchase your notebook. Follow the steps below to rebuild your C: drive. (Your C: drive will be reformatted and all data will be erased.) It is important to back up all data files before you use this option.

Before performing a restore operation, please check the BIOS settings.

1 Check to see if **Acer disk-to-disk recovery** is enabled or not.

2 Make sure the **D2D Recovery** setting in **Main** is **Enabled**.

3 Exit the BIOS setup utility and save changes. The system will reboot.

Note: To activate the BIOS setup utility, press **<F2>** during POST.

1 Restart the system.

Downloaded from www.Manualslib.com manuals search engine

Cancelling the start delay:

As long as the dishwashing cycle has not begun you are able to cancel the start delay. Continue pressing the START DELAY button until the length of the selected dishwashing cycle appears in the multi-display. The selected dishwashing cycle will begin immediately.

Changing the dishwashing cycle after the start delay has been set:

As long as the dishwashing cycle has not started, you can still change the start delay set by pressing a cycle button.

☞ **1.** Press the button for the new dishwashing cycle and hold it down.
First the indicator for the dishwashing cycle that has just been selected will flash.
After several seconds only the indicator for the new dishwashing cycle will be flashing.

2. Release the cycle button.
The newly selected dishwashing cycle will start automatically following a countdown of the hours set.

Load Sensing – Sensor Logic

If a wash programme is started even though there are only a few dishes in the upper and/or lower rack, an intelligent electronic system adjusts the amount of water and the duration of the wash programme to the number of dishes. By this means it is possible to wash only a few dishes quickly and economically. At half load (6 place settings), up to 2 litres of water and 0.2 kWh of electricity are saved.

Downloaded from www.Manualslib.com manuals search engine

hP	**Pedal-Controlled Phaser** A phaser effect with its feedback controlled by the expression pedal.
t0→t9	**Tremolo** Varies the volume of the signal, creating a rising and falling effect. Higher values result in greater depth of variation.
tP	**Pedal-Controlled Tremolo** A tremolo effect with its depth controlled by the expression pedal.
r0→r9	**Ring Modulation** An effect that modulates the amplitude of the signal, giving it a metallic sound. Higher values result in greater modulation depth.
rP	**Pedal-Controlled Ring Modulation** Ring modulation with its depth controlled by the expression pedal.
y0→y9	**Cry** Creates an effect similar to that of a voice box, adding a human-like crying effect to the sound. Higher values result in greater intensity.
yP	**Pedal-Controlled Cry** A cry effect with its filter frequency controlled by the expression pedal.
S0→S9	**Random Sample and Hold Step Filter** For this effect, the filter cutoff frequency changes abruptly to a new psuedo-random value at a fixed time interval, producing an arpeggiator-like sound.
SP	**Pedal-Controlled Step Filter** A step filter with its depth controlled by the expression pedal.
A0→A9	**Slow Attack** Reduces the attack rate of the signal, slowing the rate at which the volume of the sound rises when you attack a string. Higher values result in higher sensitivity.
n0→n9	**Auto Pan** Pans the signal back and forth from left to right at a constant rate determined by the PARAM setting. Higher values result in increased pan depth.

Disc Menu:

1 At the initial setting screen, select "Disc Languages" by using ▲ or ▼. Then press ENTER.

2 Use ▲ or ▼ to move the cursor (the yellow area) to "Disc Menu".



3 Press ENTER.

4 Use ▲ or ▼ to move the cursor (the yellow area) to the desired language. And press ENTER.



Spanish:
Show the Disc menu in Spanish.
English:
Show the Disc menu in English.
Other:
The language code setting screen appears. The procedure for setting the language code is the same as for "Audio Language" setting. Refer to the steps 5 and 6 of "Audio Language" setting.

5 Press RETURN to return to the previous screen or press SET UP to exit the setup menu.

If the language selected by these settings does not exist on the disc, then the disc's default language will be used.

Digital Output

Sets the audio output to be output from AUDIO/ OPT OUT jack of the unit according to the type of audio equipment connected to the unit.

1 At the initial setting screen, select "Digital output" by using ▲ or ▼. Then press ENTER.

2 Use ▲ or ▼ to move the cursor (the yellow area) to the suitable setting.


Choice Digital Stream type
Choose the item ▲▼
1 Bit Stream
2 2CH 48kHz 16bit PCM
ENTER Choose item RETURN Previous menu
SETUP Complete

Bit Stream (See page 40.)**:**
Digital output is applied only for DVDs with 48 kHz/16 bit linear PCM audio, and is impossible for DVDs with 48 kHz/20 bit/24 bit, 96 kHz linear PCM audio during playback. When they are played back, signals are converted into 48 kHz/16 bit with digital output. Due to secured copyrights, DVDs with PCM audio are played back at 48 kHz/16 bit or below. DVDs recorded in Dolby Digital (AC-3) format will be played back with Dolby Digital (AC-3) Bitstream (2ch-5.1ch) audio output. Select this option if your DVD player is connected to a Dolby Digital (AC-3) decoder.
When the DTS audio is selected and played, DTS bitstream is output to Bit-stream.

2CH 48KHz 16bit PCM:
Converts output into 48 kHz/16 bit PCM (2ch) when a DVD recorded in Dolby Digital (AC-3) format is played back.

3 Press ENTER.
Your entry is saved.

4 Press SET UP to exit the setup menu.

CONTINUE

Downloaded from www.Manualslib.com manuals search engine

Removing the CPU Cooler

WARNING: The heat sink becomes very hot when the system is on. NEVER touch the heat sink with any metal or with your hands.

1. Use screwdriver to loosen the four screws.

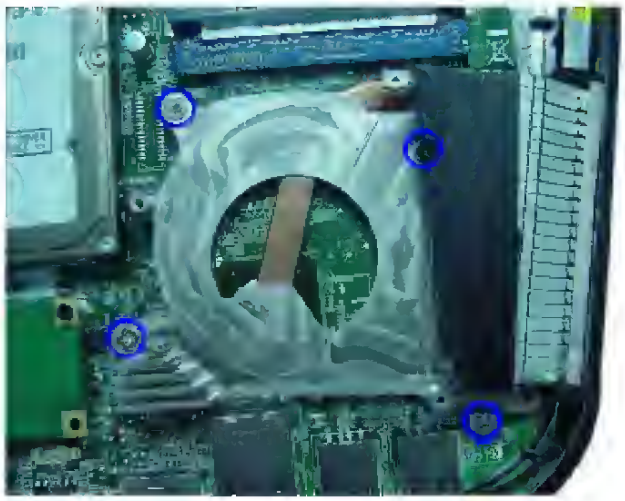

2. Lift the CPU cooler from the motherboard.

Downloaded from www.Manualslib.com manuals search engine

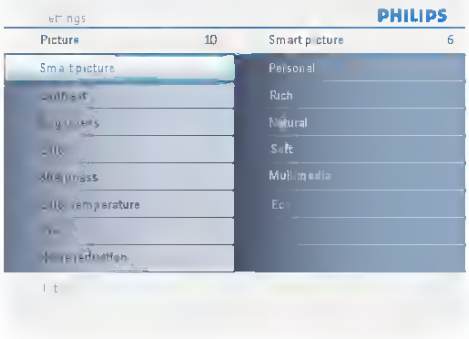

Picture menu

Note: Some menu items are not available in case of HD sources.

1. Select **Picture** in the TV Settings menu.
2. Press the cursor right key again to enter the Picture menu.
3. Select the menu items with the cursor up/down key.
4. Adjust the settings with the cursor left/right key or enter the list of submenu items with the cursor right key. Select a submenu item with the cursor up/down key.

Smart picture

1. Select **Smart picture** to display a list of predefined picture settings, each corresponding with specific factory settings. **Personal** refers to the personal preference settings of picture in the picture menu.
   Note: This Philips TV has been set at the factory to look best in bright store environments, which typically use fluorescent lighting. As your home will likely not be as well lit as a store, we recommend that you cycle through the various smart picture modes to find the one that best suits your own viewing conditions. Most consumers will find that ***Natural*** *is the correct choice*
2. You can press the **Smart picture** button on the remote control repeatedly to select either Personal, Rich, Natural, Soft, Multimedia, or Eco picture settings.
   Note:
   • The moment you are in a predefined Smart picture setting and you modify the Picture menu, all values of the menu will overwrite those previously made in personal setting.

Contrast

This will adjust the intensity of bright parts in the picture but keep the dark parts unchanged.

Brightness

This will adjust the light output of the complete picture, which will mainly affect the darker areas of the picture.

Color

This will adjust the saturation level of the colors to suit your personal preference.

Downloaded from www.Manualslib.com manuals search engine

- Кабель VGA

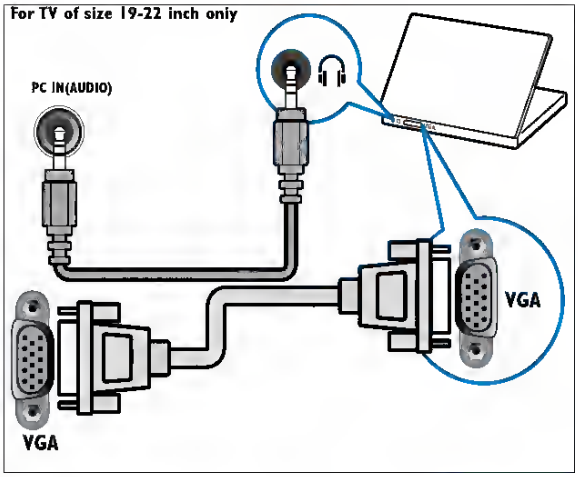

Використання модуля умовного доступу (CAM)

Модуль умовного доступу (CAM) надається операторами послуг цифрового телебачення для розкодування цифрових телевізійних каналів.

Примітка

- У разі потреби див. документацію, надану оператором, щодо встановлення смарт-карти у модуль умовного доступу.

Встановлення та увімкнення модуля CAM

Увага!

- Обов'язково дотримуйтеся викладених нижче вказівок. Неправильно вставлений CAM може пошкодити як сам модуль, так і телевізор.

1 Вимкніть телевізор.

2 Дотримуючись вказівок, зазначених на CAM, обережно вставте модуль у гніздо **COMMON INTERFACE** на бічній панелі телевізора.

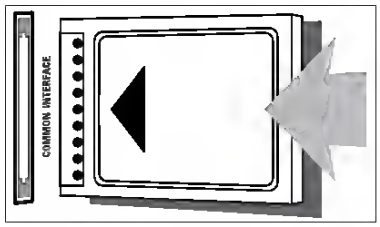

3 Вставте модуль до упору.

4 Увімкніть телевізор і зачекайте, поки модуль активується. Це може зайняти декілька хвилин. Не виймайте CAM із гнізда під час його використання. В іншому разі, цифрові послуги буде вимкнено.

Послуги модуля умовного доступу

1 Після встановлення та активування CAM натисніть ⌂ **MENU**.

2 За допомогою кнопок ▲▼◀▶ виберіть **[Налаштування]** > **[Функції]** > **[Загальний інтерфейс]**.
↳ На екрані відобразяться програми, які надає оператор послуг цифрового телебачення.

Примітка

- Цей пункт меню доступний лише за умови належного встановлення і увімкнення модуля CAM.

Downloaded from www.Manualslib.com manuals search engine

Step 4 Click **APPLY and TEST**.

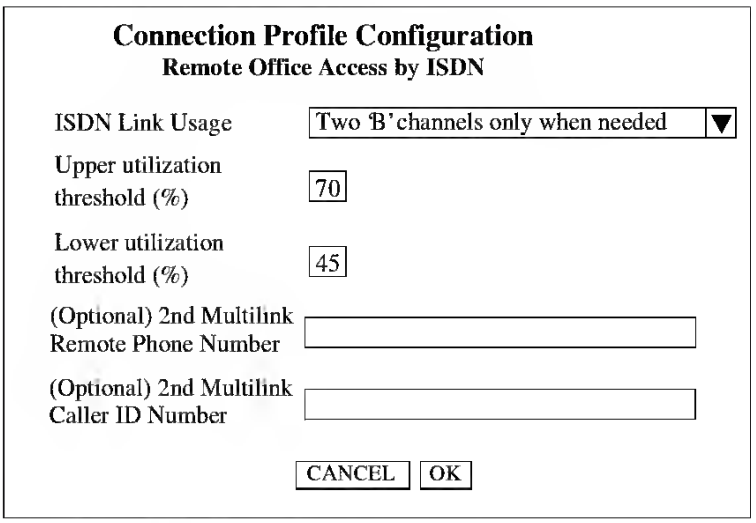

ISDN Link Usage: determines how the AcerRouter 700 utilizes the two B channels in your ISDN connection. Options are:

-**One B Channel Only:** the AcerRouter 700 will only use one B channel, regardless of the traffic.

-**Two B Channels Only When Needed:** the AcerRouter 700 will initiate a connection with one B channel, and only bring up the other B channel if the traffic increases beyond the capacity of the first B channel.

-**Always two B Channels:** the AcerRouter 700 will always use both B channels, regardless of traffic.

Note: Availability of multiple B channels depends on the capabilities of the re mote site. Using an additional B channel may mean additional cost. The same phone number will be used for both channels. Make sure the ISDN subscription specifies a hunt group for the two ISDN B channels.

Depending on the selection of the ISDN link usage, the following options may be offered.

Two 'B' channels only when needed

-**Upper utilization threshold:** determines when the AcerRouter will activate the second 'B' channel

-**Lower utilization thresbold:** determines when the AcerRouter will drop the second "B" channel call

-**Optional 2nd Multilink Remote Phone Number:** required if the remote site requires two separate numbers for dial in access

-**Optional 2nd Multilink Caller ID Number:** if the user wants to authen ticate a second Multilink channel using Caller ID.

One 'B' channel only

Step 5 Click **OK** to return to the previous screen.

Navigating using the Keyboard Keys

You can use various keystrokes to move through the terminal menu, to manage a terminal menu session, and to configure the system.

Moving Through the Menus

To do this...	Press this key...
Move up to select items	Up Arrow
Move down to select items	Down Arrow
Edit a selected menu item	Enter
Scroll through configuration parameters for a menu item	Spacebar Left/Right Arrows P or N (Prev/Next)
Cancel an edit	Escape
Return to Main Menu page	M
Access the TRACER 5045 Status page	0
Access the STRACER 5045 System Configuration Menu	1
Display the TRACER 5045 Link Performance History	2
Display the TRACER 5045 Ethernet Switch Status page	3

Session Management Keystrokes

To do this...	Press this key...
Log into a session	Spacebar
Refresh the screen	<Ctrl + L>

2. TERMINAL MENU AND SYSTEM CONTROL

Password Protection

The TRACER 5045 provides optional password protection of the terminal interface. If enabled, a password prompt is presented at power-up, reboot, modem logout, or after ten minutes of inactivity on the terminal. The password is enabled and defined via the system configuration menu.

NOTE *All TRACER 5045 systems are shipped factory default with password protection disabled.*

© 2003 ADTRAN, Inc

Downloaded from www.Manualslib.com manuals search engine

PHILIPS LIMITED WARRANTY

90 Days Labor & One (1) Year Parts & Two (2) Years Display

PHILIPS CONSUMER ELECTRONICS warrants this product against defect in material or workmanship, subject to any conditions set forth as follows.

PROOF OF PURCHASE: You must have proof of the date of purchase to receive warranted repair on the product. A sales receipt or other document showing the product and the date that you purchased the product as well as the authorized retailer included, is considered such proof.

COVERAGE:

(If the product is determined to be defective)

LABOR: For a period of ninety (90) days from the date of purchase, Philips will repair or replace the product, at its option, at no charge, or pay the labor charges to any Philips authorized repair facility. After the period of ninety (90) days, Philips will no longer be responsible for charges incurred.

PARTS: For a period of one (1) year from the date of purchase, Philips will supply at no charge, new or rebuilt replacement parts in exchange for defective parts. Philips authorized service centers will provide removal and installation of the part under the specified labor warranty.

DISPLAY: For a period of two (2) years from the date of purchase, Philips will supply, at no charge, a new or rebuilt active display device in exchange for the defective display. Philips authorized service centers will provide removal and installation of the parts under the specified labor warranty.

EXCLUDED FROM WARRANTY COVERAGE

Your warranty does not cover:

- Labor charges for installation or setup of the product, adjustment of customer controls on the product, and installation or repair of antenna systems outside of the product.
- Product repair and/or part replacement because of improper installation, connections to improper voltage supply, abuse, neglect, misuse, accident, unauthorized repair or other cause not within the control of Philips.
- A product that requires modification or adaptation to enable it to operate in any country other than the country for which it was designed, manufactured, approved and/or authorized, or repair of products damaged by these modifications.
- Damage occurring to product during shipping when improperly packaged or cost associated with packaging.
- Product lost in shipment and no signature verification of receipt can be provided.
- A product used for commercial or institutional purposes (including but not limited to rental purposes).
- Products sold AS IS or RENEWED.

TO OBTAIN WARRANTY SERVICE IN THE U.S.A., PUERTO RICO, OR U.S. VIRGIN ISLANDS...

Contact Philips Customer Care Center at: 1-888-PHILIPS (1-888-744-5477)

TO OBTAIN WARRANTY SERVICE IN CANADA...

1-800-661-6162 (French Speaking)
1-888-PHILIPS (1-888-744-5477) - (English or Spanish Speaking)

REPAIR OR REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS THE EXCLUSIVE REMEDY FOR THE CONSUMER. PHILIPS SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY ON THIS PRODUCT. EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ON THIS PRODUCT IS LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY.

Some states do not allow the exclusions or limitation of incidental or consequential damages, or allow limitations on how long an implied warranty lasts, so the above limitations or exclusions may not apply to you. In addition, if you enter into a service contract agreement with the PHILIPS partnership within ninety (90) days of the date of sale, the limitation on how long an implied warranty lasts does not apply.

This warranty gives you specific legal rights. You may have other rights which vary from state/province to state/province.

Philips, P.O. Box 671539, Marietta, GA. 30006-0026

EL6588E002 / 07-04 Printed in U.S.A.

Downloaded from www.Manualslib.com manuals search engine

- Assisting in the installation of the operating system
- Assisting in the running of diagnostic tools such as the TEST and INSPECT utilities

The first time the server is configured, the SmartStart program automatically creates a system partition and installs the configuration utility and other Compaq utilities into that partition.

Install the SmartStart and Support Software CD:

1. With your computer turned on, open the removable media access door by pressing on the left side of the door ❶ as shown below. Swing the door open ❷ to access the CD-ROM drive.

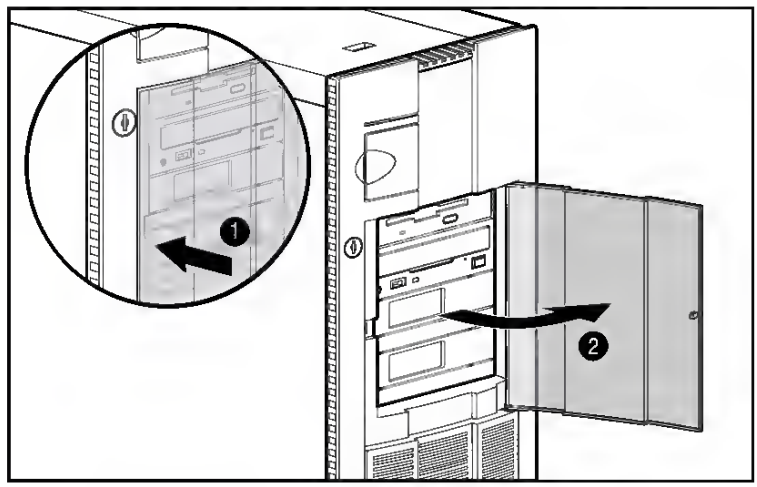

Figure 2-3. Opening the removable media access door

2. Locate the SmartStart and Support Software CD in the Server Setup and Management pack.
3. Insert the SmartStart and Support Software CD into the CD-ROM drive.

NOTE: Handle the CD by its edges rather than by the flat surfaces of the disk.

Downloaded from www.Manualslib.com manuals search engine

IMPORTANT: Refer to the Compaq Installing Rack Products CD.

You may also want to refer to the following documentation:

- Rack Resource CD Kit (shipped with Compaq racks)*
- Rack Builder Configuration Tool CD (available on the Compaq website or can be ordered with the Rack Resource CD Kit)
- Rack Information Library CD (available on the Compaq website or can be ordered with the Rack Resource CD Kit)

*The Rack 7000/4000 Series Rack Resource CD Kit ships with all Compaq 7000 and 4000 Series Racks. The Rack 9000 Series Rack Resource CD Kit ships with all Compaq 9000 Series Racks.

Server Warnings and Precautions

WARNING: To reduce the risk of electric shock or damage to the equipment:

- Do not disable the power cord grounding plug. The grounding plug is an important safety feature.
- Plug the power cord into a grounded electrical outlet that is easily accessible at all times.
- Install the power supply before connecting the power cord to the power supply.
- Unplug the power cord before removing the power supply from the server.
- If the system has multiple power supplies, disconnect power from the system by unplugging all power cords from the power supplies.

CAUTION: Because the ProLiant ML750 server does not have safety interlocks, it is possible for a unit to be operated without the cover properly installed. This could cause thermal damage to the system and may void your warranty. The Compaq ProLiant ML750 server must always be operated with the access panels on. Proper cooling will not be achieved if the access panels are removed.

Downloaded from www.Manualslib.com manuals search engine

Chapter 3

Diagnostics and Troubleshooting

This chapter describes software and firmware diagnostic tools available for Compaq server products utilizing the Server Feature Board. The sections in this chapter are:

- Diagnostic Tools Overview
- Default Configuration
- Utilities Access
- POST Error Messages
- Diagnostics Software
- Array Diagnostic Utility (ADU)
- Integrated Management Log (IML)
- Event List
- Rapid Error Recovery
- ROMPaq Error Recovery Options
- Compaq Insight Manager

Downloaded from www.Manualslib.com manuals search engine

Voorzorgsmaatregelen voor in racks geïnstalleerde producten

Stabiliteit

Om lichamelijk letsel of heschadiging van de apparatuur te voorkomen moet u het volgende controleren:

- De stelvoetjes van het rack moeten op de grond staan.
- Het rack moet met het volle gewicht op de stelvoetjes steunen.
- De stahilisatiesteunen moeten aan het rack zijn hevestigd (in geval van installatie in een enkel rack).
- Als u meerdere racks installeert, moeten deze aan elkaar worden gekoppeld.
- Schuif niet meer dan één onderdeel tegelijk uit het rack. Het rack kan instahiel worden als er om enigerlei reden meer onderdelen worden uitgeschoven.
- Wees voorzichtig wanneer u de railvergrendelingen van een onderdeel indrukt en het onderdeel in het rack schuift. De hegeleidingsrails kunnen uw vingertoppen heschadigen.
- Laad het rack van onder naar hoven en laad het zwaarste onderdeel als eerste in het rek.
- Verplaats grote en zware apparatuurracks niet zonder afdoende hulp.
- Verplaats een apparatuurrack niet op een hellend vlak van meer dan 10 graden.
- Verplaats geen volledig geladen apparatuurrack. Verwijder apparatuur uit het rack voordat u het rack verplaatst.

Omgaan met materialen

Om het risico op persoonlijk letsel of heschadiging van de apparatuur te vermijden, dient u de volgende voorzorgsmaatregelen in acht te nemen:

- Neem voor uw heroep geldende plaatselijke of landelijke gezondheids- en veiligheidsmaatregelen en richtlijnen voor het omgaan met materialen in acht.
- Zorg voor afdoende hulp hij het optillen en stahiliseren van het product hij het installeren of verwijderen.
- Verwijder alle pluggahle voedingen en modules om het gewicht van het product te verminderen.
- Zorg ervoor dat de rails goed in het product worden aangehracht. Producten waarin de rails niet goed zijn aangehracht, kunnen instahiel zijn.

Voorzorgsmaatregelen voor modems, telecommunicatie of LAN-voorzieningen

U kunt als volgt het risico van letsel door elektrische schokken als gevolg van voltages hij het overgaan van de telefoon vermijden:

- Vermijd gehruik of aansluiting van een modem of telefoon als het onweert (geldt niet voor draadloze telefoons).
- Gehruik geen telefoonlijn in de huurt van een gaslek om een gaslek te melden.
- Vermijd gehruik of aansluiting van een modem of telefoon in een natte omgeving.
- Haal altijd de modemkahel uit de vaste telefoonaansluiting voordat u de hehuizing van het product opent, interne onderdelen installeert of aanraakt, of een niet-geïsoleerde modemkahel of connector aanraakt.
- Sluit de telecommunicatie- of telefoonconnectoren niet aan op de NIC (Network Interface Card)-aansluitingen.

Voorzorgsmaatregelen voor producten met een laserapparaat

Verklein als volgt het risico van hlootstelling aan gevaarlijke straling:

- Proheer de hehuizing van het laserapparaat niet te openen. Deze apparatuur hevat geen onderdelen die door de gehruiker kunnen worden onderhouden.
- Raak alleen de in deze handleiding heschreven hedieningsinstrumenten van het laserapparaat aan. Hetzelfde geldt voor het regelen van de apparatuur en het uitvoeren van procedures.
- Laat alleen door HP geautoriseerde onderhoudsmonteurs reparaties aan uw laserapparatuur verrichten.

Downloaded from www.Manualslib.com manuals search engine

Secondly, assemble the battery FPC on MB connector, fix 2 screws on the steel disc.

Model : ZA6025 (1ICP4/82/74-2)
Rating: 3.8V
Minimum :5180mAh/19.68Wh
Limited Charge Voltage : 4.35V Typical :5340mAh/20.29Wh
batteries according to the instructions.Do not incinerate,

(6) Assemble the LINK FPC from MB and LCM connector, and paste the yellow mylar on LCM conector.

From the Electrolux Group. The world's No.1 choice.

The Electrolux Group is the world's largest producer of powered appliances for kitchen, cleaning and outdoor use. More than 55 million Electrolux Group products (such as refrigerators, cookers, washing machines, vacuum cleaners, chain saws and lawn mowers) are sold each year to a value of approx. USD 14 billion in more than 150 countries around the world.

AEG Hausgeräte GmbH
Postfach 1036
D-90327 Nürnberg

http://www.aeg.hausgeraete.de

© Copyright by AEG

822 926 484-B-230305-01 Subject to change without notice

Oven Door

The oven door of your appliance may be removed for cleaning.

Removing the oven door

1. Open the oven door completely.
2. **Completely** fold back the **brass-coloured clamping lever** on **both** door hinges.
3. Grip the oven door with both hands on the sides and close it to about 3/4 **going past the point of resistance**.
4. Pull the door away from the oven (**Caution**: heavy!).
5. Place the door, with the outer surface downwards, on a soft, flat surface, for example a blanket, to avoid scratches.

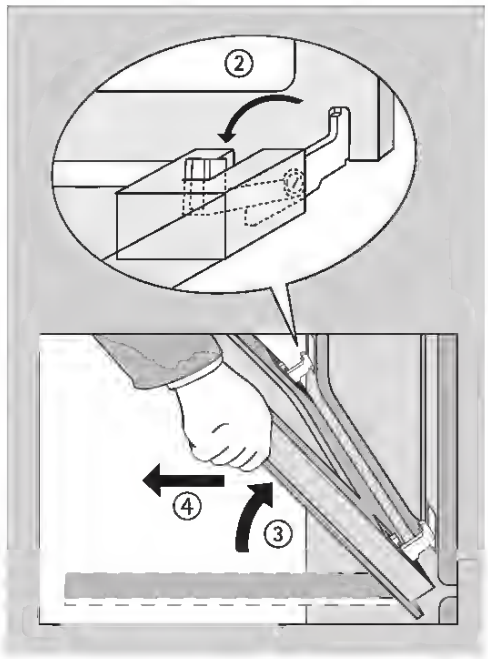

Hanging the oven door

1. With both hands take hold of the sides of the door from the side on which the handle is positioned.
2. Hold the door at an angle of approx. 60°.
3. Slide the door hinges **simultaneously** as far as possible into the two slots on the right and left at the bottom of the oven.
4. Lift the door up until resistance is met and then open fully.
5. Lift the brass-coloured clamping levers on both door hinges back to their original position.
6. Close the oven door.

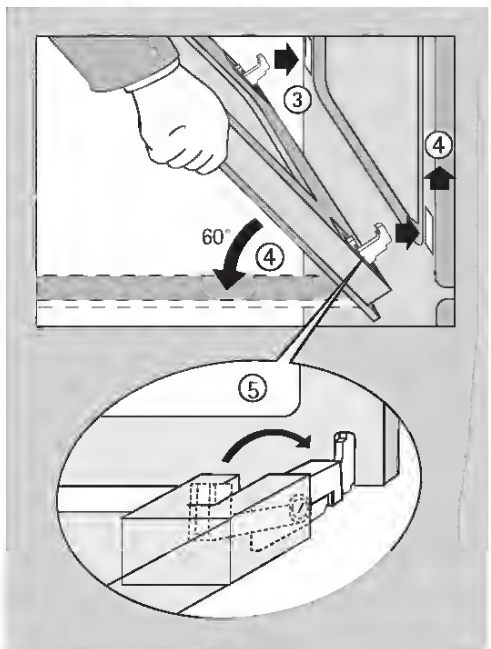

Downloaded from www.Manualslib.com manuals search engine

Table 3-2
POST Error Messages

Error Code	Audible Beeps	Probable Source of Problem	Action
A Correctable Memory Error occurred prior to this power-up	None	A memory module has experienced an error that, while recoverable, has generated a predictive failure warning.	Run Compaq Diagnostics to identify the failed memory module, and then replace it.
A Cntical Error occurred prior to this power-up	None	A catastrophic system error, which caused the server to lock up or stop responding, has been logged.	Run Compaq Diagnostics. Replace failed assembly as indicated.
Beeps only	2 long	No valid memory is present in the system.	1. If no memory modules are present, install at least one memory module to conform to minimum hardware configuration specifications 2. Reseat all installed memory modules. 3. If the system contains more than one memory module, remove one module, and restart the server. Repeat as needed to isolate the bad memory module.
Beeps only	2 long, 2 short	The power has cycled because the temperature is too hot. The processor fan is not installed, or is not spinning.	Check fans.
Critical Fan Failure Detected – System Shutting Down System Halted	None	A critical fan is not spinning.	1. Check fans. 2. Check fan cable connections.

continued

Downloaded from www.Manualslib.com manuals search engine

Removing the Mainboard

1. Remove the four screws that secure the mainboard to the chassis.

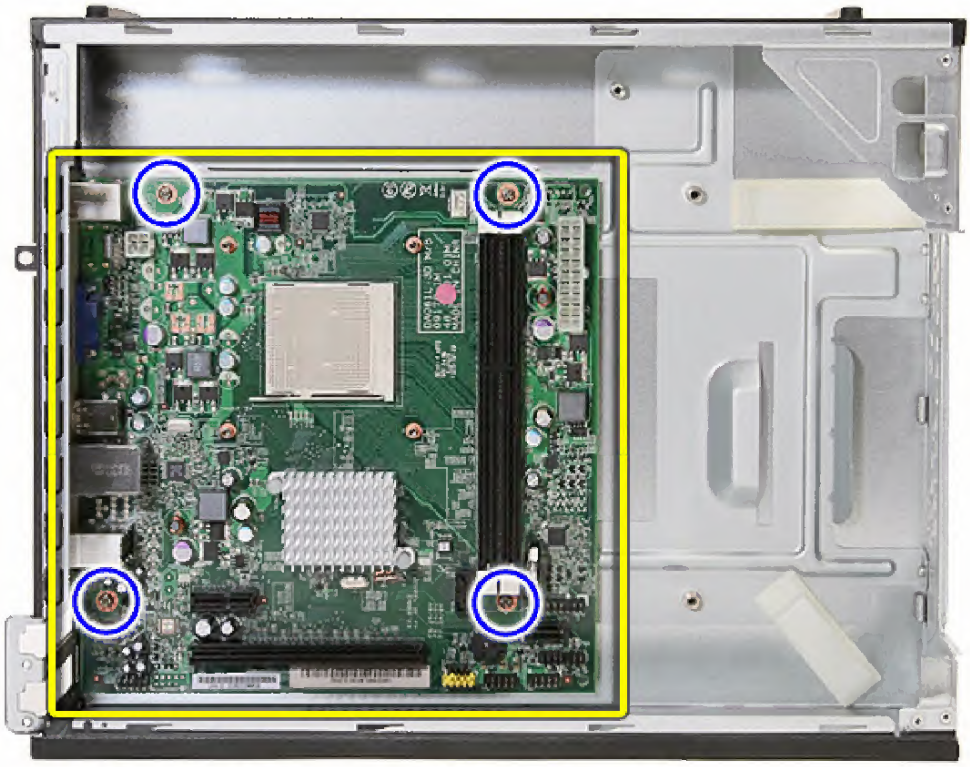

Note: Circuit boards >10 cm2 has been highlighted with the yellow rectangle as above image shows. Please detach the Circuit boards and follow local regulations for disposal.

Downloaded from www.Manualslib.com manuals search engine

Removing the Mainboard

1. Remove the eight screws that secure the mainboard to the chassis.

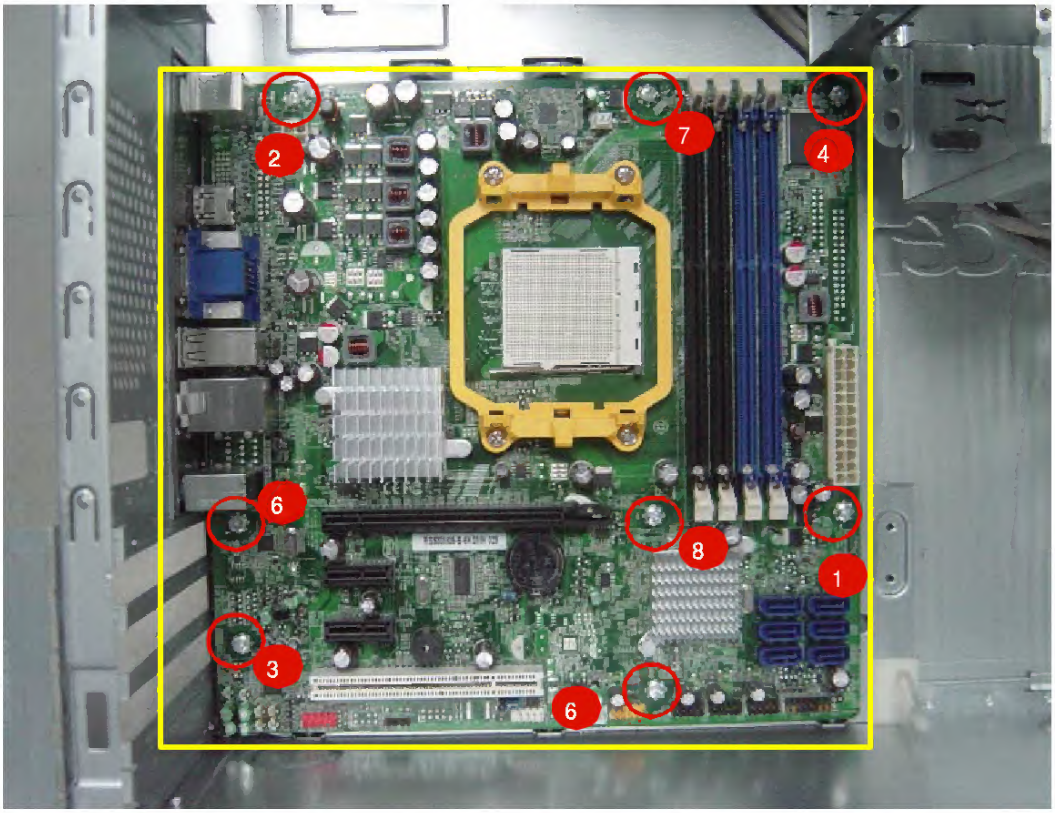

Note: Circuit boards >10 cm² has been highlighted with the yellow rectangle as above image shows.

Please detach the Circuit boards and follow local regulations for disposal.

2. Lift the board from the chassis.

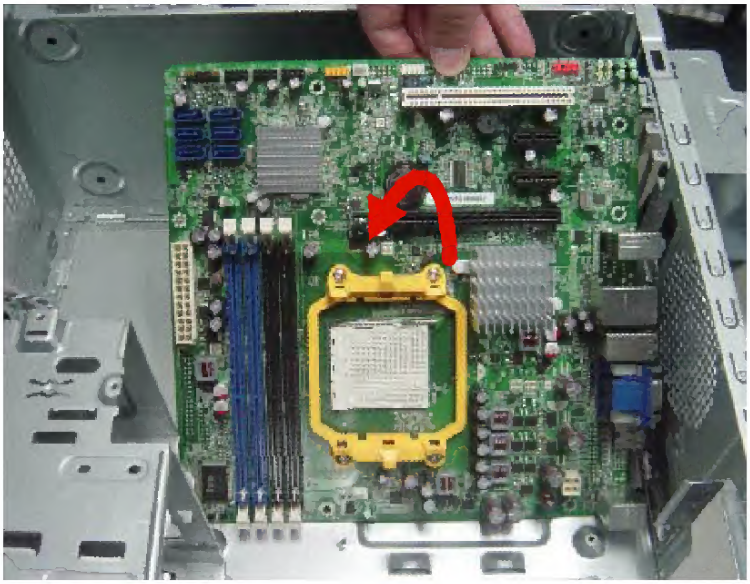

Downloaded from www.Manualslib.com manuals search engine

5.2 Available Channels in Each Country

Radio Channel Selection Table

	Regulatory domains					
Channel_ID	U.S.A.	Canada	Most of Europe	Spain	France	Japan
1	X	X	X	-	-	X
2	X	X	X	-	-	X
3	X	X	X	-	-	X
4	X	X	X	-	-	X
5	X	X	X	-	-	X
6	X	X	X	-	-	X
7	X	X	X	-	-	X
8	X	X	X	-	-	X
9	X	X	X	-	-	X
10	X	X	X	X	X	X
11	X	X	X	X	X	X
12	-	-	X	-	X	X
13	-	-	X	-	X	X
14	-	-	-	-	-	X

Downloaded from www.Manualslib.com manuals search engine

U. GPS test.

Mobile can search secondary planet signal automatic, if test ok, it will appear "stallite ID" and "stallite signals". click "Success" to into next test item.

V. G_sensor test.

There is three directions for mobile put on.

Downloaded from www.Manualslib.com manuals search engine